


This connector must be used for IP66 classification. Using any other connector will cause water to seep in and damage the camera.

The cable diameter can be between 5.5 mm and 8.5 mm.

1. Insert the cable over the plug hood.
2. Prepare the cable.
3. Insert the cable into the cable manager.
4. Cut the single wire. (use small wire cutter.)
5. Close the connector.
6. Insert the RJ-45 plug into the plug hood.

Pin	EIA/ TIA 568 B
1	orange/white
2	orange
3	green/white
4	blue
5	blue/white
6	green
7	brown/white
8	brown

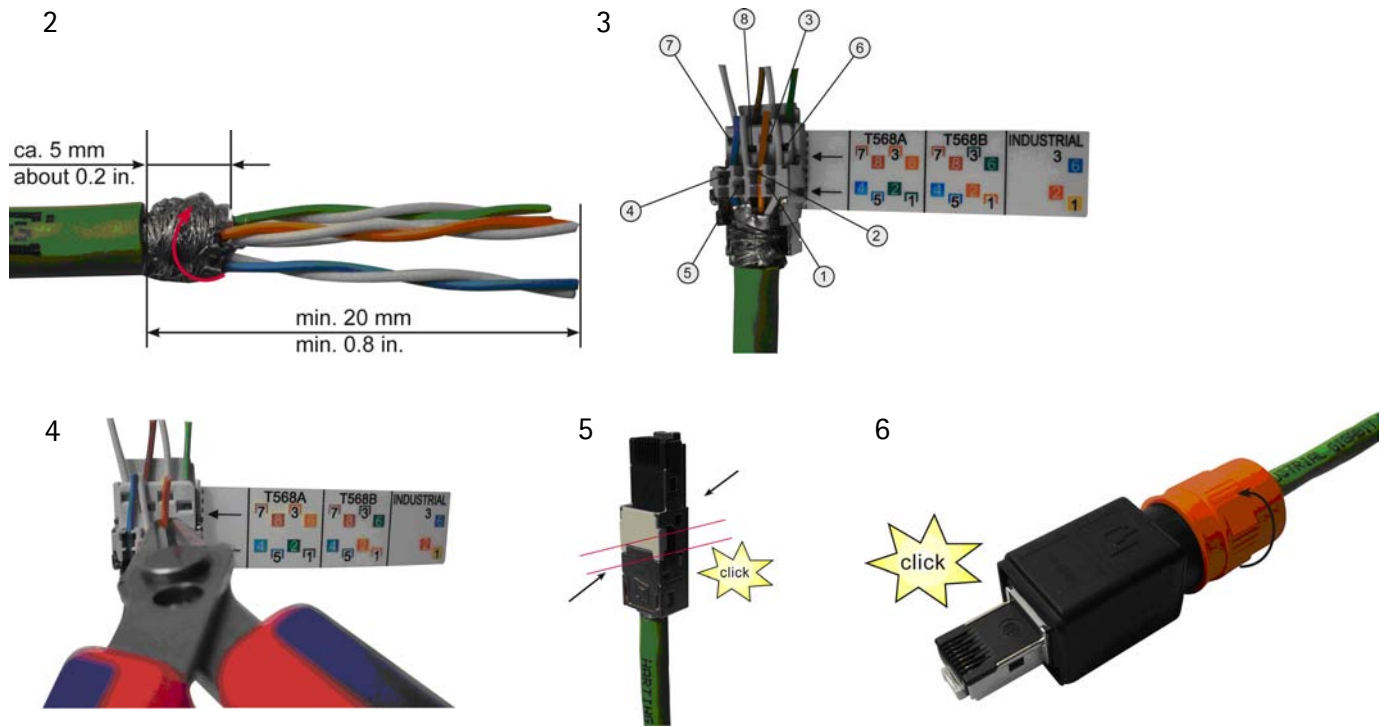

Disassembly

1. Open the cable gland.
2. Unlatch the RJ-45 plug and insert with small screw driver.

