

**Presented By: City of Overland Park**

Contact Phone:

Customer Name:

Project Name:

Contact E-mail:

Fixture Type:



GE  
Lighting

**14675 - GE Ecolux® Lucalox® High Pressure Sodium ED18**

**LU400/ECO/NC**

- ☞ Passes TCLP, which can lower disposal costs.
- ☞ Non-cycling feature makes locating and replacing end-of-life lamps quick and easy

**Product Photo**



**GENERAL CHARACTERISTICS**

Base Description	Mogul Screw
Base Type	Screw-In
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Mercury-Picogram per mean lm hr	3.4
Rated Life Hours-nominal	40000 h
Bulb Finishes and Colors	Clear
Mercury Content EMEA ONLY	6.64
Bulb Material	Hard glass
Product Technology	High Intensity Discharge
Base	E39
Bulb Shape	ED18

**PHOTOMETRIC CHARACTERISTICS**

Effective Arc Length	3.375 in
Mean Lumens nominal	48600 lm
Nominal Lumens per Watt	135 lm
Initial Lumens-nominal	54000 lm
Color Rendering Index-CRI	30
Color Temperature	2100 K

**PRODUCT INFORMATION**

Product Code	14675
Description	LU400/ECO/NC
Alternative Unit Of Measure	CASE

**DIMENSIONS**

Diameter	2.25 in
Light Center Length Millimeter	5.75 in
Nominal Length	9.75 in

**ELECTRICAL CHARACTERISTICS**

Burn Position	Universal burning position
Hot Restart Time to 90%MAX	5 min
Open Circuit Voltage (RMS lag ballast) (MIN)	198 V
Rated power (Watts)	400 W

**CAUTIONS & WARNINGS**

**WARNING:** This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

**Caution**

**Risk of Burn**

- Allow lamp to cool before handling.
- Do not turn on lamp until fully installed.

**Lamp may shatter and cause injury if broken**

- Dispose of lamp in a closed container.
- Do not use excessive force when installing lamp.
- Do not use lamp if outer glass is scratched or broken.
- Wear safety glasses and gloves when handling lamp.

**Warning**

**Risk of Electric Shock**

- Do not use where directly exposed to water or outdoors without an enclosed fixture.

Turn power off before inspection  
installation or removal.

Contains sodium ? chemical burn risk

Avoid skin contact with broken pieces.

Risk of Fire

Keep combustible materials away from lamp.

Use in fixture rated for this product.

Unexpected lamp rupture may cause injury, fire, or property damage



Do not exceed rated voltage.

Do not store flammable materials near/below S-rated lamp in open fixture

Do not turn on lamp until fully installed.

Do not use lamp if outer glass is scratched or broken.

Do not use where directly exposed to water or outdoors

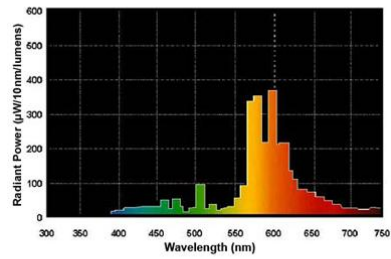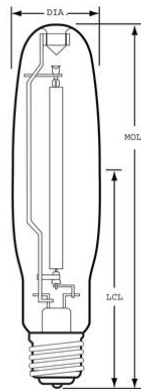

Mar 3, 2016 9:34:21 PM For additional information, visit [www.gelighting.com](http://www.gelighting.com)