



10 1/2" To 12 1/2"  
Dia. Bolt Circle

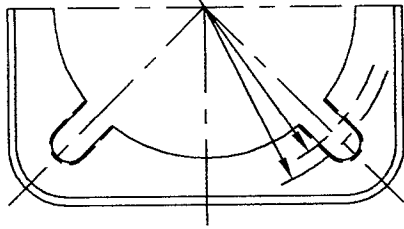


- BASE SUPPLIED WITH:
- (1) Door And 1/4"-20NC S.S. Hex. Hd. Screw
  - (2) Eight 1" Washers 1/2" Thick x 2 3/4" O.D. (Galv. Per ASTM A153 Or ASTM B454)
  - (3) Four 1"-8NC x 3 3/4" Long Galv. Stl. Hex. Hd. Bolts
  - (4) Four 1"-8NC Galv. Stl. Hex. Nuts
  - (5) Four 1" Galv. Stl. Lockwashers
  - (6) Four 1" Galv. Stl. Flatwashers

AKRON FOUNDRY TB6-9"

MATERIAL: Alum. Alloy 356-T6

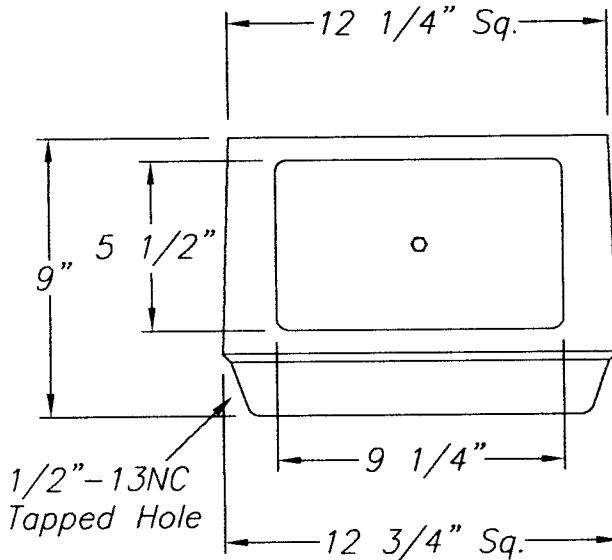

4043 Weld Wire (Heat Treat After Welding)

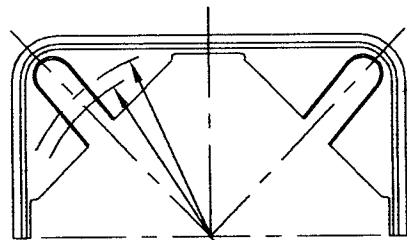

10 1/2" To 12 1/2"  
Dia. Bolt Circle

4043 Wire With Approximately 5" Of Total Weld On Internal Corners

1/4"

NO.	REVISIONS	DATE
1.	Top Bolt Circle Was 11.5" To 12.5"	12/99
2.	Was A77612	03/00
3.	Top Bolt Circle Was 11" To 12.5" & Bottom Was 11.5" To 12.5"	07/00

**hapco**

A Kearney-National  
Company

TITLE 9" TRANSFORMER BASE	
CUSTOMER	
SCALE 6	DATE 04/04/98
BY LW	DWG. NO.
CHK'D	A79402