


# ALTOS® Lite Loose Tube, Gel-Free, Single-Jacket, Single-Armored Cables with FastAccess® Technology

12 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Corning ALTOS® Lite gel-free, single-jacket, single-armored cables with FastAccess® technology are designed for direct-buried installations. The innovative FastAccess technology feature combined with the gel-free loose tube design simplifies removal of the cable jacket and accessing the buffer tubes. The gel-free design means the cables are fully waterblocked using craft-friendly water-swallowable materials which makes cable access simple and require no clean up. The loose tube design uses Corning's SMF-28® Ultra fiber to provide reliable transmission parameters for a variety of voice, data, video and imaging applications. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy midspan access. The single-armored construction provides additional crush and rodent protection. These cables have a medium-density polyethylene jacket that is rugged, durable and easy to strip.

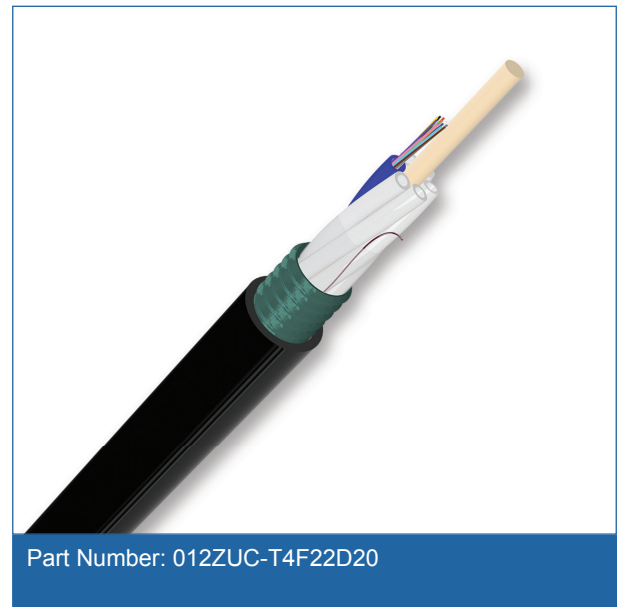

## Features and Benefits

### ALTOS® Lite FastAccess® Technology

Corning's ALTOS Lite FastAccess Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes and up to a 60 percent improvement in cable access time. These technologies also reduce the overall risk of inadvertent fiber damage by reducing the need for sharp cable access tools.

### Stranded optical core

Elimination of overlapping yarn binders around stranded tubes to reduce end access time

### Fully waterblocked loose tube all-dielectric gel-free design

Simple access and no clean up

### Single-armored construction


Provides additional crush and rodent protection

### Polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### Available with Corning's SMF-28® Ultra fiber

ITU-T G.652 D and ITU-T G.657 A1 compliant fiber ready for any application

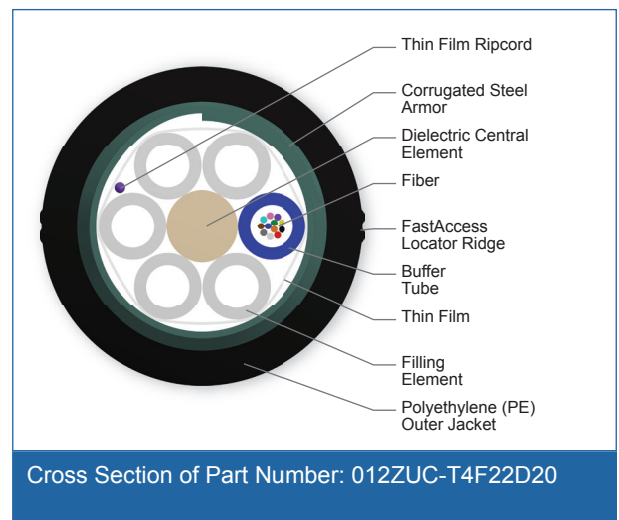

# ALTOS® Lite Loose Tube, Gel-Free, Single-Jacket, Single-Armored Cables with FastAccess® Technology

12 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Standards

**Common Installations** Outdoor lashed aerial, duct and direct-buried; indoor when installed according to National Electrical Code® (NEC®) Article 770

**Design and Test Criteria** ANSI/ICEA S-87-640

## Specifications

General Specifications	
Environment	Outdoor
Application	Aerial, Direct Buried, Duct
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	1
Buffer Tube Color Coding	Blue
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	5
Tape	Water-Swellable
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Number of Ripcords	2

# ALTOS® Lite Loose Tube, Gel-Free, Single-Jacket, Single-Armored Cables with FastAccess® Technology

12 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Cable Design

Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	116 kg/km (78 lb/1000 ft)
Nominal Outer Diameter	11.70 mm (0.46 in)
Min. Bend Radius Installation	176 mm (7.0 in)
Min. Bend Radius Operation	117 mm (4.6 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Name	SMF-28® Ultra fiber
Fiber Category	G.652.D/G.657.A1
Fiber Code	Z
Performance Option Code	22
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.22 dB/km
Typical Attenuation*	0.32 dB/km / 0.32 dB/km / 0.18 dB/km

\* For more information on typical attenuation please see the Corning whitepaper at [http://csmedia.corning.com/opcomm//Resource\\_Documents/whitepapers\\_rl/LAN-1863-AEN.pdf](http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_rl/LAN-1863-AEN.pdf)

# ALTOS® Lite Loose Tube, Gel-Free, Single-Jacket, Single-Armored Cables with FastAccess® Technology

12 F, SMF-28® Ultra fiber, Single-mode (OS2)



## Ordering Information

Part Number	012ZUC-T4F22D20
Product Description	ALTOS® Lite Loose Tube, Gel-Free, Single-Jacket, Single-Armored Cables with FastAccess® Technology, 12 F, SMF-28® Ultra fiber, Single-mode (OS2)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.