

# LED Traffic Signal 12V Modules

8 and 12 inch



## Features, Benefits and Values

- Chromaticity in accordance to ITE VTCSH-STD Part 2, July 1998<sup>1</sup>
- All products shipped with installed gasket
- High efficiency & long life LED light source
- Failure of single LED results in loss of light from only that LED
- Moisture and dust resistant
- Regulated power supply
- UV stabilized shell
- Direct retrofit design




imagination at work

# LED Traffic Signal 12V Modules

- 8 and 12 inch

## Mechanical Outline Dimensions in inches. (mm) indicates metric equivalent

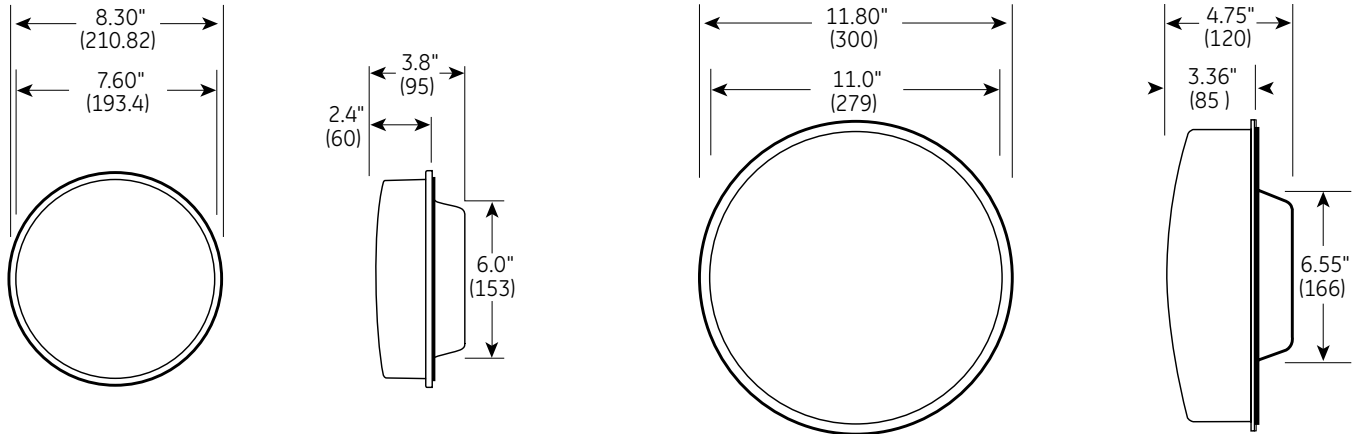

## Design Compliance

Test Type	Compliance
Luminous Intensity	ITE VTCOSH-STD Part 2, July 1998
Chromaticity	ITE VTCOSH-STD Part 2, July 1998 <sup>1</sup>
Moisture Resistance	NEMA STD 250 Type 4 - 1991
Mechanical Vibration	MIL-STD-833 Method 2007
Electronic Noise	FCC Title 47 Sub. B Sec 15 <sup>2</sup>
Transient Voltage Protection	ITE VTCOSH-STD Part 2, July 1998

## Operating Specifications

Parameter	Rating
Operating Temperature Range*	-40°C (-40°F) to +74°C (165°F)
Operating Voltage Range	6.5V - 15V
Power Factor (PF)	>90%
Total Harmonic Distortion (THD)	<20%
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	16 AWG, Color Coded with Strain Relief 48 in long minimum

<sup>1</sup> Measured at T<sub>a</sub> = 25°C for Yellow

<sup>2</sup> Class A

## Product Information

Model Number	Size (in)	AC or DC Voltage Nominal	Power (W) Nominal	Wavelength (nm) Dominant	Maintained Intensity Minimum <sup>3</sup>	# of High Brightness LEDs
DR4-RTFB-23B	8	12V - 60Hz	10.0	626	133	88
DR4-YTFB-23B	8	12V - 60Hz	10.0	588	267 <sup>4</sup>	88
DR4-GCFB-23B	8	12V - 60Hz	8.0	500	267	60
DR6-RTFB-23B	12	12V - 60Hz	13.5	626	339	132
DR6-YTFB-23B	12	12V - 60Hz	19.0	588	678 <sup>4</sup>	196
DR6-GCFB-23B	12	12V - 60Hz	12.0	500	678	132

<sup>3</sup> Measured at ± 2.5°H - 2.5°V

<sup>4</sup> Actual intensity less than ITE VTCOSH-STD Part 2, July 1998 Specification

Distributed by:



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com

1 - 8 8 8 - 6 9 - 4 3 - 5 3 3

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.

© 2011 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

TRAF118-R041411