




Bare Copper

Solid

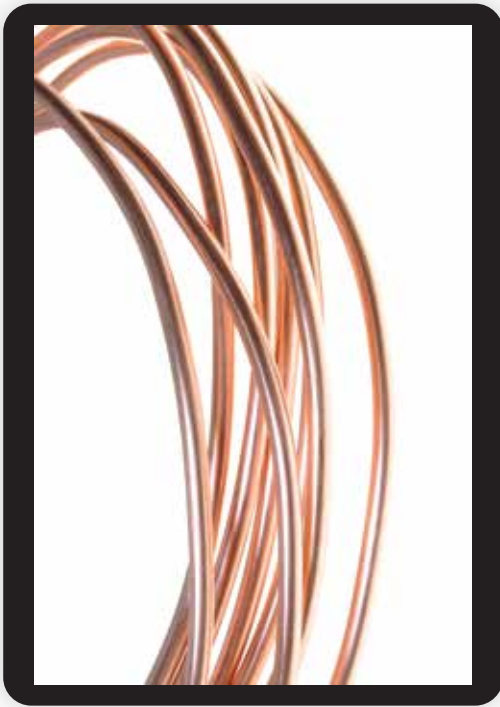

DESCRIPTION: Bare Copper conductors are primarily used for grounding purposes as specified in the National Electrical Code. Alan Wire Bare Copper conductors are normally annealed (soft) copper, solid or stranded. Medium-hard drawn and hard drawn tempers are also available in solid and stranded. Sizes 14 thru 2 are available in solid. Sizes 8 thru 2 are available in 7 strand. Sizes 1 thru 4/0 are available in 7 strand and 19 strand. 250 MCM, 350 MCM, and 500 MCM are available in 37 strand only. 600 MCM and 750 MCM are available in 61 strand only.

SPECIFICATION: Alan Wire Bare Copper conductors meet applicable ASTM specifications and requirements of the National Electrical Code.

- STANDARDS:**
- B-1 (Hard Drawn)
 - B-2 (Medium Hard Drawn)
 - B-3 (Soft or Annealed)
 - REA/RUS Approved
 - RoHS Compliant

Size (AWG)	Strands	Bare WT./MFT	Footage Per 25lb Spool	Spools Per Box
14	Solid	12.4	2000	2
12	Solid	19.8	1250	2
10	Solid	31.5	800	2
8	Solid	50.0	500	4
6	Solid	79.5	315	4
4	Solid	126.3	200	4
2	Solid	200.9	125	2

