


# Rigid Non-Metallic Schedule 40 Electrical Conduit

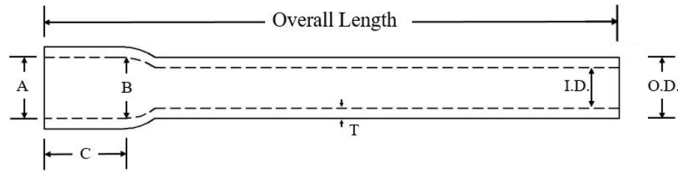

Trade Size (in)	O.D.	Min I.D.	Min Wall Thk., T	Approx. Weight, lbs/ft	Bell Entrance A	Bell Bottom B	Bell Length C
1/2	0.840	0.578	0.109	0.165	0.852	0.836	1.75
3/4	1.050	0.780	0.113	0.220	1.064	1.046	2.25
1	1.315	1.004	0.133	0.326	1.330	1.310	2.25
1 1/4	1.660	1.335	0.140	0.441	1.677	1.655	2.25
1 1/2	1.900	1.564	0.145	0.528	1.918	1.894	2.75
2	2.375	2.021	0.154	0.730	2.393	2.369	4.00
2 1/2	2.875	2.414	0.203	1.158	2.890	2.868	4.00
3	3.500	3.008	0.216	1.609	3.515	3.492	4.00
3 1/2	4.000	3.486	0.226	1.935	4.015	3.992	4.00
4	4.500	3.961	0.237	2.292	4.515	4.491	5.00
5	5.563	4.975	0.258	3.105	5.593	5.553	5.75
6	6.625	5.986	0.280	4.030	6.658	6.614	6.50
8*	8.625	7.853	0.322	6.065	8.670	8.610	6.50

- 6" and below tested and certified by ETL Intertek to UL651. UL651 does not include 8"
- Dimensions are nominal (inches) and are subject to normal manufacturing tolerances

Trade Size (in)	10' Length		20' Length		10' Crate Quantity ft	20' Crate Quantity ft
	Catalog Part Number	System Part Number	Catalog Part Number	System Part Number		
1/2	4005010	8102	4005020	8502	6000	12000
3/4	4007510	8103	4007520	8503	4400	8800
1	4010010	8104	4010020	8504	3600	7200
1 1/4	4012510	8105	4012520	8505	3300	6600
1 1/2	4015010	8106	4015020	8506	2250	4500
2	4020010	8108	4020020	8508	1400	2800
2 1/2	4025010	8110	4025020	8510	930	1860
3	4030010	8112	4030020	8512	880	1760
3 1/2	4035010	8114	4035020	8514	630	1260
4	4040010	8116	4040020	8516	570	1140
5	4050010	8120	4050020	8520	380	760
6	4060010	8124	4060020	8524	260	520
8	4080010	880747	4080020	924297	140	280

- Lengths shown are nominal (inches) and are subject to normal manufacturing tolerances
- UL 651
- NEMA TC-2
- Sunlight resistant per UL 651
- Listed for 90° C conductors or cable
- Rigid non-metallic raceway for wires and cables in accordance with the NEC