


# Rigid Non-Metallic Schedule 80 Electrical Conduit

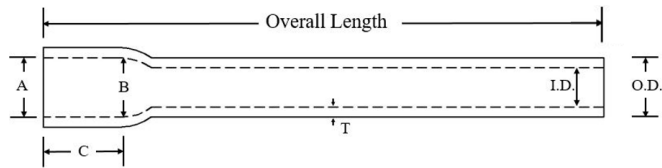

Trade Size (in)	O.D.	Min I.D.	Min Wall Thk., T	Approx. Weight, lbs/ft	Bell Entrance A	Bell Bottom B	Bell Length C
1/2	0.840	0.502	0.147	0.205	0.852	0.836	1.75
3/4	1.050	0.698	0.154	0.278	1.064	1.046	2.25
1	1.315	0.910	0.179	0.410	1.330	1.310	2.25
1 1/4	1.660	1.227	0.191	0.565	1.677	1.655	2.25
1 1/2	1.900	1.446	0.200	0.726	1.918	1.894	2.75
2	2.375	1.881	0.218	1.004	2.393	2.369	4.00
2 1/2	2.875	2.250	0.276	1.531	2.890	2.868	4.00
3	3.500	2.820	0.300	2.049	3.515	3.492	4.00
3 1/2	4.000	3.280	0.318	2.499	4.015	3.992	4.00
4	4.500	3.737	0.337	3.122	4.515	4.491	5.00
5	5.563	4.713	0.375	4.330	5.593	5.553	5.75
6	6.625	5.646	0.432	5.954	6.658	6.614	6.50
8 *	8.625	7.455	0.500	9.042	8.670	8.610	6.50

- 6" and below tested and certified by ETL Intertek to UL651. UL651 does not include 8"
- Dimensions are nominal (inches) and are subject to normal manufacturing tolerances

Trade Size (in)	10' Length		20' Length		10' Crate Quantity ft	20' Crate Quantity ft
	Catalog Part Number	System Part Number	Catalog Part Number	System Part Number		
1/2	8005010	9302	8005020	925785	6000	12000
3/4	8007510	9303	8007520	9503	4400	8800
1	8010010	9304	8010020	9504	3600	7200
1 1/4	8012510	9305	8012520	924298	3300	6600
1 1/2	8015010	9306	8015020	9506	2250	4500
2	8020010	9308	8020020	9508	1400	2800
2 1/2	8025010	9310	8025020	924299	930	1860
3	8030010	9312	8030020	9512	880	1760
3 1/2	8035010	924024	8035020	925941	630	1260
4	8040010	9316	8040020	9516	570	1140
5	8050010	9320	8050020	9520	380	760
6	8060010	9324	8060020	9524	260	520
8	8080010	906397	8080020	924567	140	280

- Lengths shown are nominal (inches) and are subject to normal manufacturing tolerances
- UL 651
- NEMA TC-2
- Sunlight resistant per UL 651
- Listed for 90° C conductors or cable
- Rigid non-metallic raceway for wires and cables in accordance with the NEC
- Product manufactured with one integral solvent-weld bell standard per length