

BP1	4

LINE

PART NO.

MARK ASSY. COMP.

DESCRIPTION

LENGTH
FT. IN.
2 1/2

GRADE

FIELD BOLTS

3/8(16)X 2-1/2 FULL THD HEX CAP
3/8(16) FINISHED HEX NUT
3/8" COMMERCIAL FLAT WASHER

304 SS 18-8 SS 18-8 SS

 FINISH
 REMARKS
 WEIGHT

 MILL
 0.09
 0.36

 MILL
 0.02
 0.08

 MILL
 0.02
 0.08

E

PART NO.

MARK

QTY.

DESCRIPTION

BILL OF MATERIAL

LENGTH

PL = IN X IN

FT. IN.

GRADE

FINISH REMARKS

WEIGHT

ANTITHEFTGTYPE860F2 PLA013048120

AT1 BP1

14" ANTI THEFT PREVENTION PLATE
11 GA.

14

14

A1011

COMP. ASSY. 7.03 7.03 6.64

1/4THK 1" X 4 RUBBER GASKET
1/4FL X 1" X 4" THEFT BAR BLK

SHORE A-50 DURO. A36

0.25 0.14

RUBGASK100400 THEFTBAR100400

ANTI THEFT ASSEMBLY~AT1

GENERAL NOTES:

1. HOLES TO BE MADE AS NOTED.

2. WELDING SHALL BE DONE IN ACCORDANCE WITH D1.1/D1.1M AWS WELDING CODE.

3. ALL WELDED JOINTS SHALL BE PREPPED IN ACCORDANCE WITH THE WPS.

4. MATERIALS TO BE COATED SHALL BE PREPPED IN ACCORDANCE WITH THE PRODUC DESIGNATED ASTM SPECIFICATION.

5. FABRICATED PRODUCTS ARE TO BE HOT DIP GALVANIZED PER ASTM A123.

6. THREADED PARTS AND HARDWARE IS TO BE HOT DIP GALVANIZED PER ASTM A153.


7. DIMENSIONAL TOLERANCES ARE TO BE ± 1/8" OF NOTED DIMENSION.

8. AXIAL TOLERANCES ARE TO BE ± 1°.

9. HOLE TOLERANCES TO BE +1/16", -0" OF NOTED DIMENSION.

10. ALL MATERIALS SHALL BE 100% MELTED AND MANUFACTURED IN THE U.S.A.

	REV.	DESCRIPTION	AUTHOR	DATE	ANTILTHEET DEVICE TYPE 860E9	
	A	FOR APPROVAL	J. KISS	23		
)					DATE: 05/18/23	QUOTE NO.: Q02
					DETAILED BY: J. KISS	P.O. NO.: N/A
					CHECKED BY: M. VALAITIS	ORDER NO.: N/A
					REVISION LEVEL: A	SHEET NO
RODUCT					P.O. COMPANY: N/A	OTIEET NO.
					CONTRACTOR: N/A	2 0 0 0
					PROJECT OWNER: N/A	1 0 7 2
A153			J.H.	BOT	J.H. BOTTS, LLC	
			BRIDGE & HWY.		S CERTIFIED	
		~	METAL PRODUCTS) A FABRICATOR	
		ſ	253 E. BRUCE ST.	Á	JOLIET, IL	

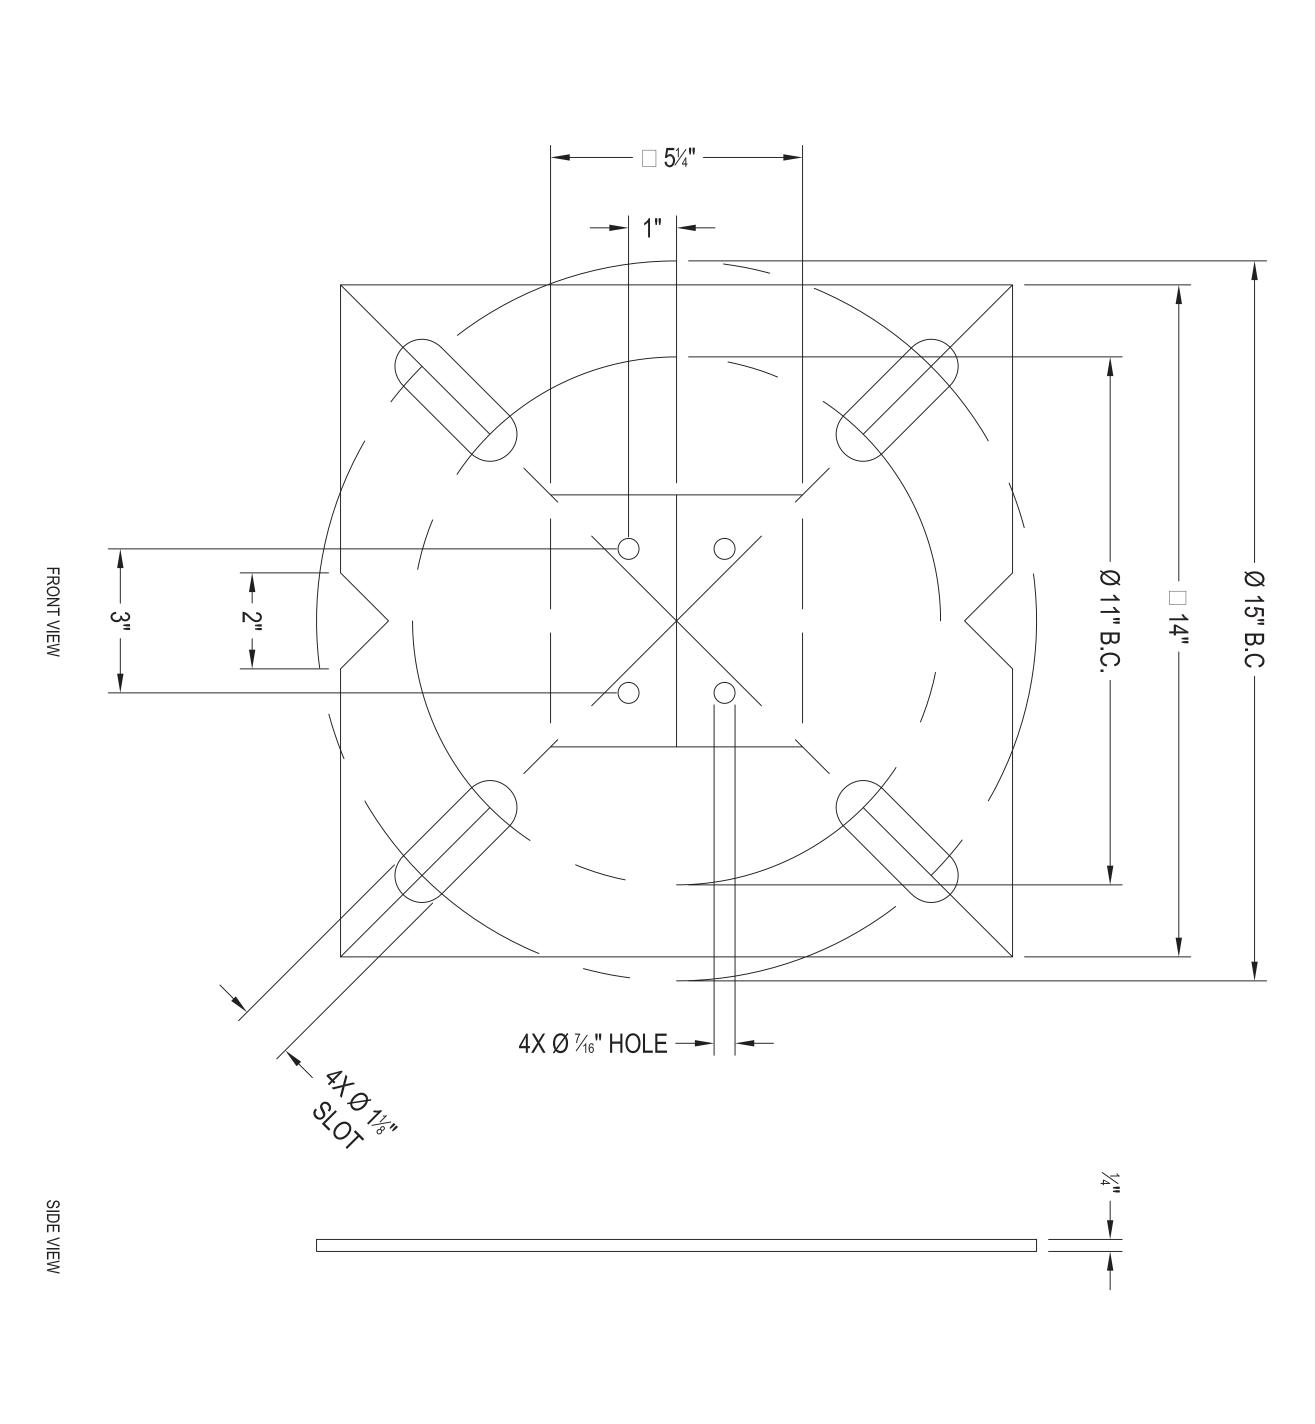

FRONT VIEW

SIDE VIEW

2X Ø 1/46" HOLE

ယ္ခ

21

4

2~THEFT

BAR~TB1

ONE~BASE PLATE~BP1 (PRIOR TO FORMING)

GENERAL NOTES:

1. HOLES TO BE MADE AS NOTED.

2. WELDING SHALL BE DONE IN ACCORDANCE WITH D1.1/D1.1M AWS WELDING CODE.

3. ALL WELDED JOINTS SHALL BE PREPPED IN ACCORDANCE WITH THE WPS.

4. MATERIALS TO BE COATED SHALL BE PREPPED IN ACCORDANCE WITH THE PRODUCT DESIGNATED ASTM SPECIFICATION.

5. FABRICATED PRODUCTS ARE TO BE HOT DIP GALVANIZED PER ASTM A123.

6. THREADED PARTS AND HARDWARE IS TO BE HOT DIP GALVANIZED PER ASTM A153.

7. DIMENSIONAL TOLERANCES ARE TO BE ± 1/8" OF NOTED DIMENSION.

8. AXIAL TOLERANCES ARE TO BE ± 1°.

9. HOLE TOLERANCES TO BE +1/16", -0" OF NOTED DIMENSION.

10. ALL MATERIALS SHALL BE 100% MELTED AND MANUFACTURED IN THE U.S.A. BRIDGE & HWY.
METAL PRODUCTS 253 E. BRUCE ST. J.H. BOTTS, LLC S CERTIFIED FABRICATOR

ANTI-THEFT DEVICE TYPE 860F2

OUOTE NO.: QOZ
P.O. NO.: N/A
ORDER NO.: N/A
SHEET NO.

2 OF 2

FRONT VIEW 2X Ø %" HOLE ယ္န 4 2 SIDE VIEW

2½"(16UNC,2A) -

4~RUBER GASKET~RG1

4~3/8" HEX BOLT W/ NUT & WASHER~HB1