


Specifications		Color Code	Put-Ups
Conductor - Stranded Bare Copper per ASTM B-3, B-8 Insulation 16 AWG - .025" (.635mm) PE 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	Jacket - PVC Voltage Rating - 600 V Temp. Rating - 75°C	Per Specification, See Color Code Tables on Page 15.	Standard Reels 2,500' and 5,000' <i>Other lengths available. Please consult your factory representative for availability.</i>

PART NO.	NO. OF COND	OUTER JKT THICKNESS		NOMINAL O.D.		WEIGHT lbs. / 1M'
		INCH	mm	INCH	mm	
16 AWG						
8162	2	.045	1.143	.310	7.88	45
8163	3	.045	1.143	.326	8.28	56
8164	4	.045	1.143	.354	8.99	73
8165	5	.045	1.143	.386	9.80	87
8167	7	.045	1.143	.417	10.59	108
8169	9	.060	1.524	.497	12.62	147
81610	10	.060	1.524	.517	13.13	160
81612	12	.060	1.524	.554	14.07	195
81616	16	.060	1.524	.620	15.75	235
81620	20	.060	1.524	.678	17.22	284
14 AWG						
8102	2	.045	1.143	.340	8.64	58
8103	3	.045	1.143	.358	9.09	76
8104	4	.045	1.143	.390	9.91	94
8105	5	.045	1.143	.428	10.87	113
8107	7	.045	1.143	.465	11.81	148
8109	9	.060	1.524	.570	14.48	203
8110	10	.060	1.524	.612	15.55	224
8112	12	.060	1.524	.612	15.55	256
8114	14	.060	1.524	.666	16.92	293
8115	15	.060	1.524	.702	17.83	315
8116	16	.060	1.524	.702	17.83	332
8119	19	.060	1.524	.739	18.77	383
8120	20	.060	1.524	.771	19.58	403
8121	21	.060	1.524	.777	19.74	419
8125	25	.060	1.524	.911	23.14	529
8126	26	.060	1.524	.991	25.17	544
12 AWG						
8502	2	.045	1.143	.398	10.11	84
8503	3	.045	1.143	.421	10.69	111
8504	4	.045	1.143	.464	11.79	139
8505	5	.045	1.143	.506	12.85	168
8507	7	.045	1.143	.582	14.78	242
8509	9	.060	1.524	.674	17.12	304
8510	10	.060	1.524	.674	17.12	321
8512	12	.060	1.524	.755	19.18	402
8516	16	.060	1.524	.878	22.30	535
8519	19	.060	1.524	.930	23.62	623
8520	20	.080	2.03	.951	24.16	652
8521	21	.080	2.03	.971	24.66	682
8525	25	.080	2.03	1.044	25.52	798

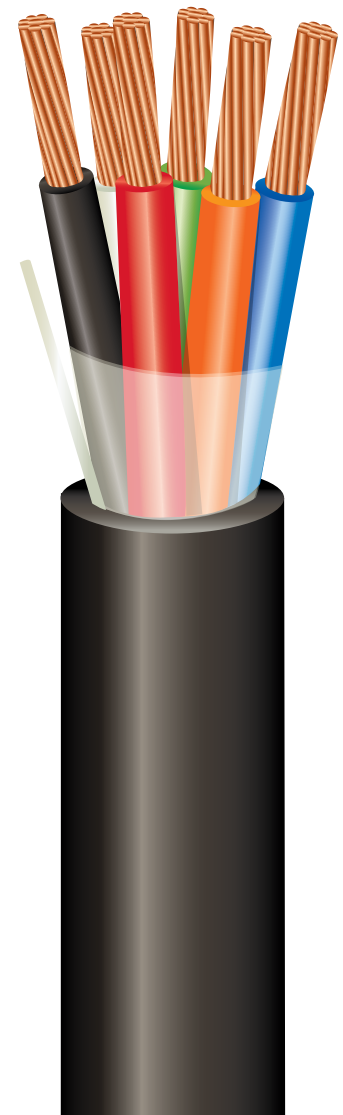

Cable Identification

Indent print on jacket
 "ADVANCED DIGITAL CABLE,
 INC. IMSA 19-1 YYYY* 600V"
**replace YYYY with year of manufacture*

Inkjet print on reverse side of
 jacket with footage markers.

The information contained on this specification is intended to be used as a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice.

Phone: (800) 343 2579 • Fax: (828) 389 3922 • www.adcable.com

Rev 062618

