


Specifications		Color Code	Put-Ups
<b>Conductor</b> - Stranded Bare Copper <b>Insulation</b> 16 AWG - .025" (.635mm) PE 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	<b>Jacket</b> - PVC <b>Voltage Rating</b> - 600 V <b>Temp. Rating</b> - 75°C	Per Specification, See Color Code Tables on Page 15.	Standard Reels 2,500' and 5,000' <i>Other lengths available. Please consult your factory representative for availability.</i>

PART NO.	NO. OF COND	OUTER JKT THICKNESS		NOMINAL O.D.		WEIGHT lbs. / 1M'
		INCH	mm	INCH	mm	
<b>16 AWG</b>						
8162	2	.045	1.143	.310	7.87	47
8163	3	.045	1.143	.328	8.33	60
8164	4	.045	1.143	.355	9.02	72
8165	5	.045	1.143	.376	9.55	84
8167	7	.045	1.143	.417	10.59	108
8169	9	.045	1.143	.486	12.34	134
81610	10	.045	1.143	.504	12.80	146
81612	12	.060	1.524	.553	14.05	179
81616	16	.060	1.524	.620	15.75	227
81620	20	.060	1.524	.678	17.22	275
<b>14 AWG</b>						
8102	2	.045	1.143	.340	8.64	60
8103	3	.045	1.143	.361	9.17	78
8104	4	.045	1.143	.391	9.93	96
8105	5	.045	1.143	.416	10.57	113
8107	7	.045	1.143	.462	11.73	148
8109	9	.060	1.524	.570	14.48	196
8110	10	.060	1.524	.592	15.04	213
8112	12	.060	1.524	.612	15.54	247
8114	14	.060	1.524	.652	16.56	283
8115	15	.060	1.524	.670	17.02	300
8116	16	.060	1.524	.688	17.48	318
8119	19	.060	1.524	.738	18.75	370
8120	20	.060	1.524	.771	19.58	387
8121	21	.060	1.524	.785	19.94	405
8125	25	.080	2.03	.883	22.43	496
8126	26	.080	2.03	.898	22.81	514
<b>12 AWG</b>						
8502	2	.045	1.143	.398	10.11	82
8503	3	.045	1.143	.423	10.74	109
8504	4	.045	1.143	.461	11.71	136
8505	5	.045	1.143	.490	12.45	164
8507	7	.060	1.524	.579	14.71	228
8509	9	.060	1.524	.660	16.76	286
8510	10	.060	1.524	.718	18.24	314
8512	12	.060	1.524	.753	19.13	368
8516	16	.080	2.03	.870	22.10	495
8519	19	.080	2.03	.922	23.42	578
8520	20	.080	2.03	.970	24.64	608
8521	21	.080	2.03	.981	24.92	635
8525	25	.080	2.03	1.070	27.18	746

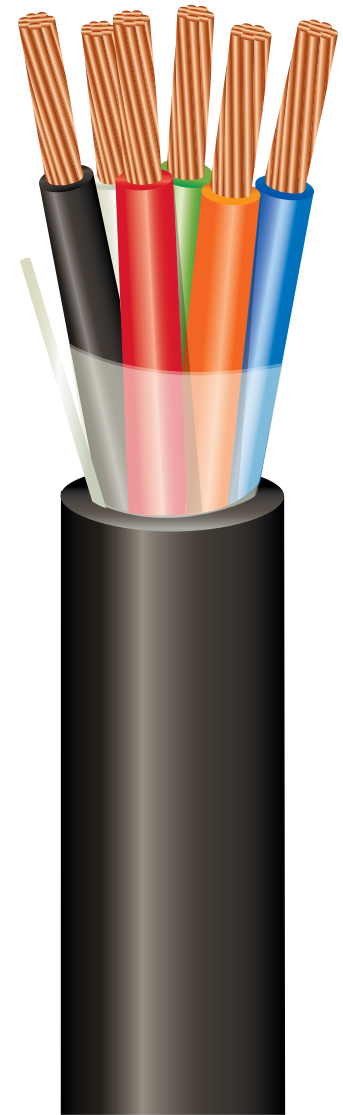

### Cable Identification

Indent print on jacket  
 "ADVANCED DIGITAL CABLE,  
 INC. IMSA 19-1 YYYY\* 600V"  
*\*replace YYYY with year of manufacturer*

Inkjet print on reverse side of  
 jacket with footage markers.

The information contained on this specification is intended to be used as a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice.