



1744 FORREST WAY
CARSON CITY, NV 89706


PHONE (775) 841-5444

FAX (775) 841-0342

WEB www.cable-tec.com

EMAIL info@cable-tec.com

Aluminum Reverse Threaded

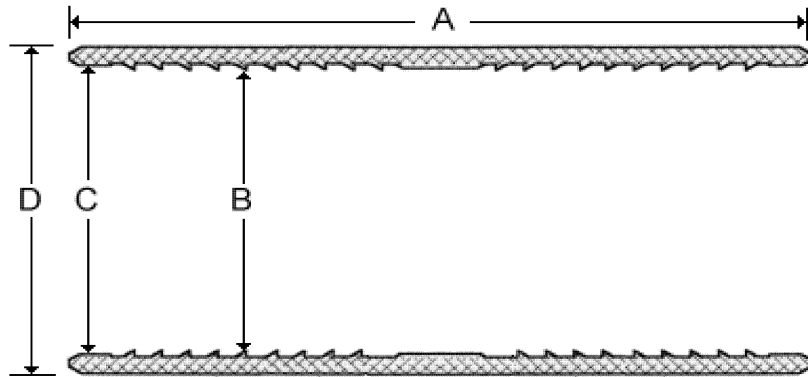

The right hand/left hand reverse thread aluminum couplings are our most economical and versatile coupling for polyethylene innerduct. The couplings work equally well for smooth wall, corrugated, or ribbed type innerduct, and are made in all sizes of SDR and SIDR rated innerducts from 1/2" to 6". Thread-on couplings can be installed by hand or with one of Cabletec's manual or hydraulic powered coupling presses.

The sharp buttress type threads withstand high pulling loads that meet or exceed the Bellcore tensile standard of 1000 lbs. These couplings are machined with one degree of taper and have a long chamfered lead-in for straight, easy starting. The couplings incorporate a wide, six pitch thread angle which greatly reduces the number of revolutions necessary to install the couplings. These versatile couplings can be used in manholes, direct bury, aerial, or any application except where an air or water tight connection is required.

PART #	DIM A	DIM B	DIM C	DIM D
AS.840	2.50	0.815	0.875	1.000
AS1.050	4.00	1.025	1.125	1.250
AS1.315	4.00	1.290	1.390	1.500
AS1.660	4.00	1.635	1.735	1.900
AS1.900	4.00	1.875	1.975	2.100
AS2.375	4.00	2.350	2.450	2.610
AS2.875	4.00	2.850	2.950	3.250
AS3.500	4.50	3.475	3.550	4.000
AS4.500	5.00	4.475	4.575	5.000
AS5.526	6.00	5.500	5.600	6.000
AS6.625	6.00	6.000	6.700	7.000

Note: Listed sizes are stock items, but custom sizes can be made

