


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL DRAWING	07 MAY 09	RRM
	B	MADE THREADS 6" FOR AB-18	21 SEP 10	

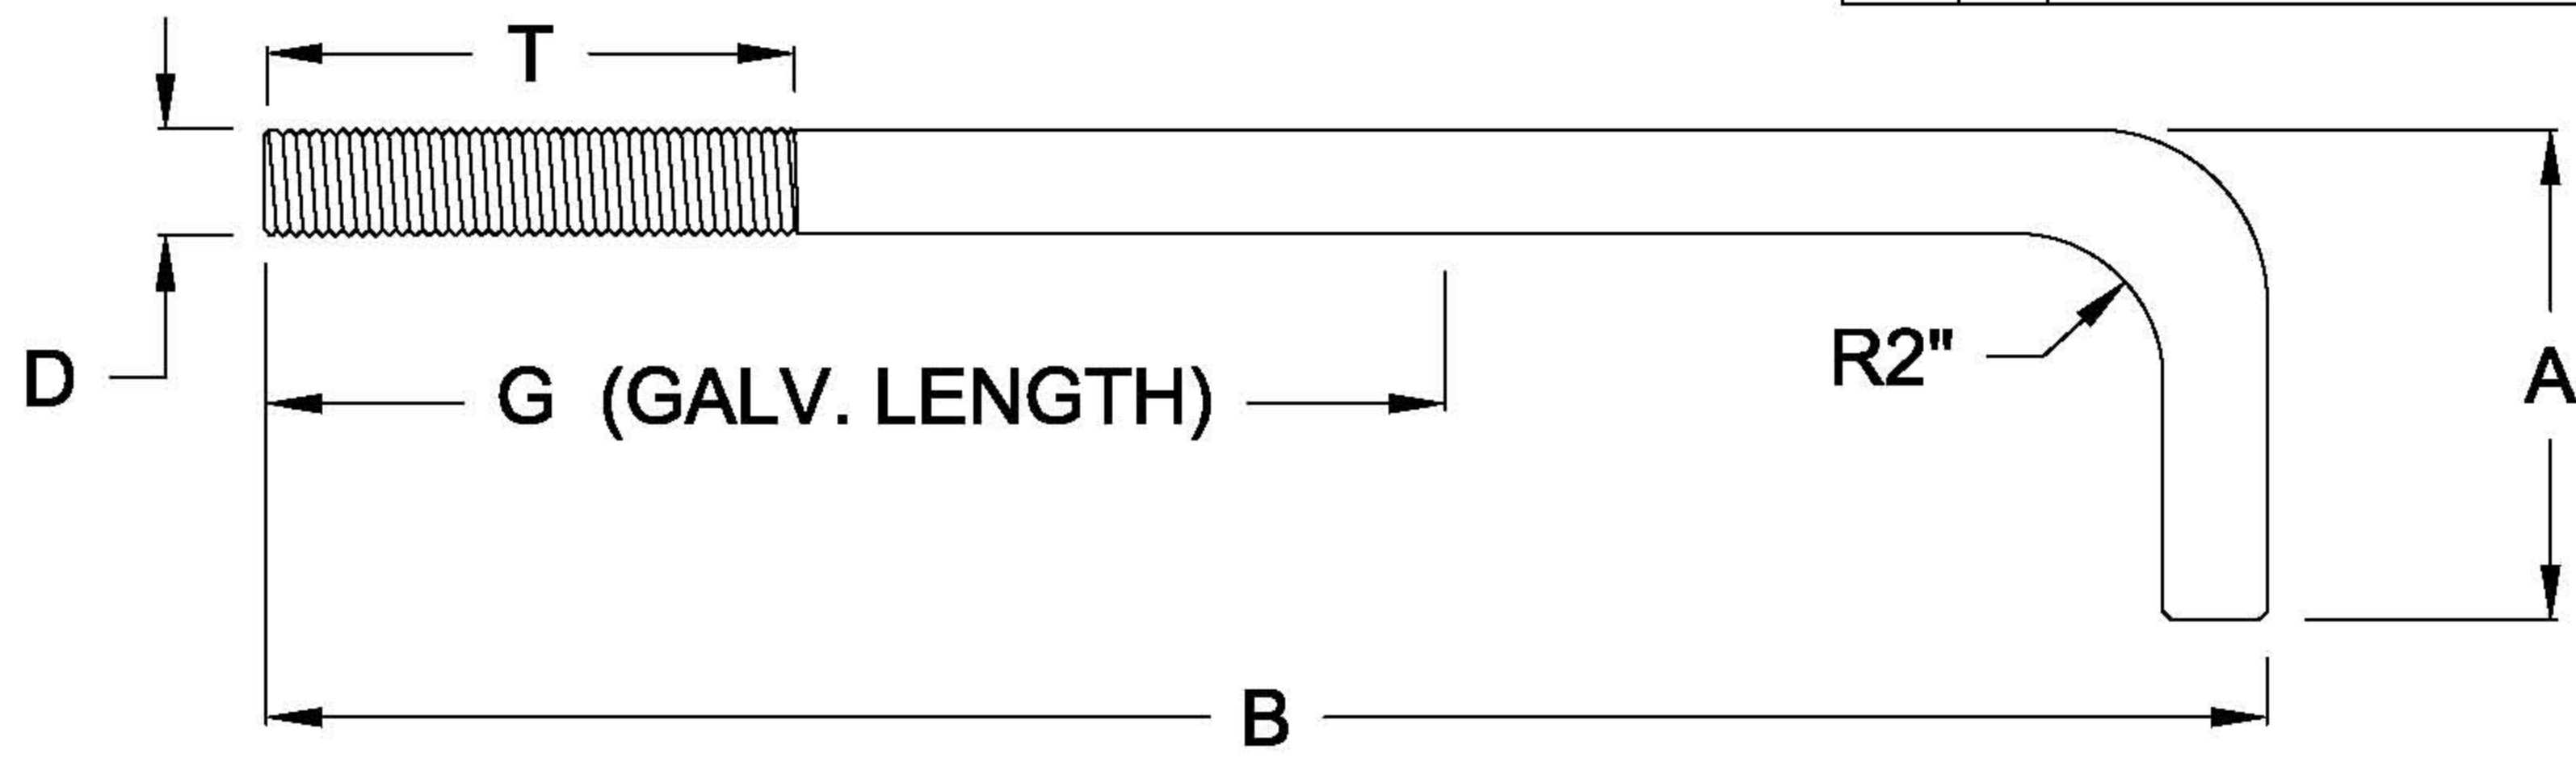

Anchor Bolts						
CPI Part No.	D (inches)	B (inches)	A (inches)	T (inches)	G (inches)	Wt. (lbs.)
CPI - AB - 1.25 - 564	1.25	56	4	9	12	21.0
CPI - AB - 1.00 - 564	1.00	56	4	9	12	12.0
CPI - AB - 1.00 - 364	1.00	36	4	5	36	8.0
CPI - AB - .75 - 264	.75	24	6	6	24	3.8
CPI - AB - 18	.75	18	4	6	18	2.5

NOTES: Weights include 1 Flat Washer (2" Min. O.D.), 1 Lock Washer (Optional) and 1 Hexagonal Nut.

Anchor bolts have a minimum yield point of 36,000 psi.

Hot Dipped Galvanized per AASHTO 232
(Equivalent to A 153 / A 153M)

Component Products, Inc. 521 Morse Avenue Schaumburg, IL 60193 Tel (847) 301-1000 Fax (847) 301- 0100		CPI Anchor Bolt Data Table			
		CPI "L" Shaped Anchor Bolts			
Grade A 36 Steel	SIZE B	Drawn By: RRM	DWG NO. CPI Anchor Bolt Data Table 07 MAY 09	REV B	
Hot Dipped Galvanized	SCALE N/A		SHEET 1 of 1		