3048

OLDCASTLE POLYMER

(formerly H-Series)

COVER

Style: Flush 2-Piece
Material: Polymer Concrete

Model: 30" x 48"

Weight: Tier 15: 110 lbs. (per half)

Tier 22: 169 lbs. (per half)

Std. Fasteners: 1/2-13 Stainless Steel Hex Head

Bolt, Washer and Floating Nut

Options: Logos and Special Markings

Surface: Slip Resistant

Performance: ANSI/SCTE-77, Tier 15 or Tier 22*

Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location.

BODY

Material: Polymer Concrete

Model: 30" x 48"

Weight: 18" Depth: 179 lbs.

24" Depth: 223 lbs.

36" Depth: 307 lbs.

Wall Type: Straight

Performance: ANSI/SCTE-77 Tier 22

LOAD RATING / NOTES





MEDIUM DUTY ANSI/SCTE TIER 15




HEAVY DUTY
ANSI/SCTE TIER 22

For use in non-vehicular traffic situations only. Weights and dimensions may vary slightly. Actual load rating is determined by the box and cover combination.

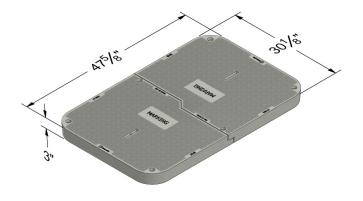

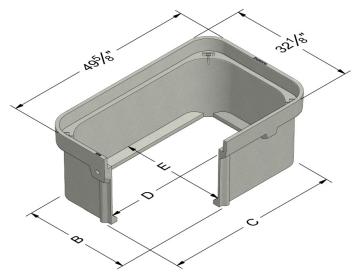

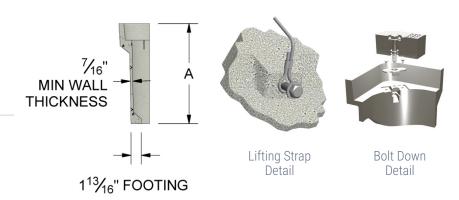

| | А | В | С | D | Е |
|---------|----|---------|----------|--------|--------|
| 3048-18 | 18 | 29-7/16 | 46-15/16 | 44-1/2 | 27 |
| 3048-24 | 24 | 29-5/16 | 46-13/16 | 44-1/4 | 26-3/4 |
| 3048-36 | 36 | 29 | 46-1/2 | 44-1/8 | 26-5/8 |

^{*} Based upon lid and body combination, this unit can be Tier 15 or Tier 22. T22 rating when paired with T22 polymer concrete lid.

3048


OLDCASTLE POLYMER

(formerly H-Series)

COVER OPTIONS

Oldcastle Polymer, Flush Solid Oldcastle Polymer, Flush 2-Piece

Oldcastle Polymer, Flush Pedestal Provision Steel, Solid





FASTENER OPTIONS

Hex Head Bolt (A)

Penta Head Bolt (B) Penta Head Coil Thread Bolt (B) Oldcastle Vandal Resistant Bolt (C) Captive Bolt Retainer



Standard Thread



Coil Thread

Bolt Retainer (for standard thread)



ADD ON OPTIONS

EMS Marker

Mouseholes/Knockouts

Rack Mount

Cable Racks/Cable Arms

Unistrut

Pulling Eye - 1,000 lb and 3,000 lb

Ground Buss

Dividers

Racking Provision

Lid Gaskets*

Solid Bottom

Custom Marking Plate (Polymer)



Rack Mount



EMS Marker



Cable Rack Cable Arm



Unistrut





Ground Bus

^{*} Lid Gaskets inhibit water flow into the box, they do not make enclosure fully waterproof.



All information contained on this sheet is current at the time of publication. Oldcastle reserves the right to discontinue or update product information without notice.

Revision 11/09/18 © 2018 Oldcastle Infrastructure



OLDCASTLE POLYMER 2436 Continued

| RATING | PART # | DESC 1 | DESC 2 | COLOR | DEPTH | ITEM WEIGHT | PALLET QTY | DESIGN LOAD (LB) | QUICK SHIP |
|--------|----------|---|------------------|-------|-------|----------------|---------------|---------------------|---------------|
| T15 | 24361633 | Unit, PC2436-36, T15 - "Electric" | PC243636-T15 | Gray | 36" | 399.0 | 1 | 15000 | |
| T15 | 24361634 | Unit, PC2436-36, T15_'FIBER OPTICS' | PC243636-T15_457 | Gray | 36" | 399.0 | 1 | 15000 | |
| T15 | 24361635 | Unit, PC2436-36, T15 -"Street Lighting" | PC243636-T15 | Gray | 36" | 399.0 | 1 | 15000 | |
| T15 | 24361636 | Unit, PC2436-36, T15 -"Traffic Signal" | PC243636-T15 | Gray | 36" | 399.0 | 1 | 15000 | |
| T15 | 24361470 | Unit, PC2436-36/SYN2436 T15 HBIt WAX_'MKNG PLT REQ' | PC243636-T15 | Gray | 36" | 399.0 | 1 | 15000 | |
| T22 | 24361025 | Unit, PC2436-18, T22 - "Electric" | PC243618-T22 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361027 | Unit, PC2436-18, T22 - Blank | PC243618-T22 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361607 | Unit, PC2436-18, T22_'FIBER OPTICS' | PC243618-T22_457 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361608 | Unit, PC2436-18, T22 - "Street Lighting" | PC243618-T22 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361609 | Unit, PC2436-18, T22 - "Traffic Signal" | PC243618-T22 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361456 | Unit, PC2436-18 T22 HBlt WAX_'MRKNG PLT REQ' | PC243618-T22_999 | Gray | 18" | 345.0 | 3 | 22500 | |
| T22 | 24361028 | Unit, PC2436-24, T22 - "Electric" | PC243624-T22 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361030 | Unit, PC2436-24, T22 - Blank | PC243624-T22 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361206 | Unit, PC2436-24, T22_'FIBER OPTICS' | PC243624-T22_457 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361617 | Unit, PC2436-24, T22 - "Street Lighting" | PC243624-T22 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361618 | Unit, PC2436-24, T22 - "Traffic Signal" | PC243624-T22 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361461 | Unit, PC2436-24 T22 HBIt WAX_'MARKING PLATE REQ' | PC243624-T22_999 | Gray | 24" | 380.0 | 2 | 22500 | |
| T22 | 24361466 | Unit, PC2436-30 T22 HBlt WAX_'MRKNG PLT REQ' | PC243630-T22_999 | Gray | 30" | 425.0 | 2 | 22500 | |
| T22 | 24361626 | Unit, PC2436-30, T22 - "Electric" | PC243630-T22 | Gray | 30" | 425.0 | 2 | 22500 | |

OLDCASTLE POLYMER 3048

Polymer Concrete - 30" x 48" (formerly H-Series)









| RATING | PART # | DESC 1 | DESC 2 | COLOR | DEPTH | ITEM WEIGHT | PALLET | DESIGN LOAD (LB) | QUICK |
|-----------|---------------|---|---------------------------|-------|-------|----------------|--------|---------------------|-------|
| Body - 3 | 048 | | | | | | | 20110 (25) | |
| T22 | 30482008 | Body, PC3048-18,SW | PC304818SW | Gray | 18" | 188.0 | 2 | 22500 | |
| T22 | 30482021 | Body, PC3048-24,SW | PC304824SW | Gray | 24" | 234.0 | 2 | 22500 | 100 |
| T22 | 30482020 | Body, PC3048-30,SW | PC304830SW | Gray | 30" | 301.0 | 1 | 22500 | |
| T22 | 30482017 | Body, PC3048-36,SW | PC304836SW | Gray | 36" | 307.0 | 1 | 22500 | |
| Lid - 304 | 18 | | | | | | | | |
| T15 | 30484602 | Lid, PC3048-T, T15 - Blank,2pc | PC3048T-T15 | Gray | - | 220.0 | 5 | 15000 | T |
| T15 | 30484606 | Lid, PC3048-T, T15 - "Electric", 2pc | PC3048T-T15 | Gray | - | 220.0 | 5 | 15000 | |
| T15 | 30484607 | Lid, PC3048-T, T15_'FIBER OPTICS'_2pc | PC3048T-T15_457 | Gray | - | 220.0 | 5 | 15000 | |
| T15 | 30484608 | Lid, PC3048-T, T15 - "Ground", 2pc | PC3048T-T15 | Gray | - | 220.0 | 5 | 15000 | 1 |
| T15 | 30484609 | Lid, PC3048-T, T15 - "Street Lighting", 2pc | PC3048T-T15 | Gray | - | 220.0 | 5 | 15000 | |
| T15 | 30484611 | Lid, PC3048-T, T15 -"Traffic Signal",2pc | PC3048T-T15 | Gray | - | 220.0 | 5 | 15000 | 1 |
| T15 | 30484694 | Lid, PC3048-T, T15 -SPECIAL,2pc w/ | PC3048T-T15 999 | Gray | - | 220.0 | 5 | 15000 | 1 |
| T22 | 30484001 | Lid, PC3048-T, T22 - "Electric",2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | |
| T22 | 30484003 | Lid, PC3048-T , T22 - Blank,2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | 1 |
| T22 | 30484011 | Lid, PC3048-T,T22 - "Electric" | PC3048T-T22 1pc | Gray | - | 338.0 | 5 | 22500 | |
| T22 | 30484012 | Lid, PC3048-T, T22 - "Fiber Optics",2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | |
| T22 | 30484015 | Lid, PC3048-T, T22 - "Traffic Signal",2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | |
| T22 | 30484613 | Lid, PC3048-T, T22 - "Street Lighting",2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | |
| T22 | 30484614 | Lid, PC3048-T, T22 - 4x8 MRKNG PLT REQ,2pc | PC3048T-T22 | Gray | - | 338.0 | 5 | 22500 | |
| Unit - 30 | 48 (Units com | e standard with Body-Open Bottom, Lid, and SS H | ex Bolt Floating Nut Hard | ware) | | | | | |
| T15 | 30481600 | Unit, PC3048-18, T15 - Blank | PC304818-T15 | Gray | 18" | 408.0 | 2 | 15000 | |
| T15 | 30481603 | Unit, PC3048-18, T15 - "Electric" | PC304818-T15 | Gray | 18" | 408.0 | 2 | 15000 | |
| T15 | 30481604 | Unit, PC3048-18, T15_'FIBER OPTICS' | PC304818-T15_457 | Gray | 18" | 408.0 | 2 | 15000 | 1 |



Products are rated by the lowest component rating Tier 15 cover with a tier 22 body is rated tier 15. Tier 22 cover with a tier 22 body is rated tier 22.

OLDCASTLE POLYMER 3048 Continued

| RATING | PART # | DESC 1 | DESC 2 | COLOR | DEPTH | ITEM WEIGHT | PALLET QTY | DESIGN LOAD (LB) | QUICK SHIP |
|--------|----------|---|------------------|-------|-------|----------------|---------------|---------------------|---------------|
| T15 | 30481605 | Unit, PC3048-18, T15 - "Street Lighting" | PC304818-T15 | Gray | 18" | 408.0 | 2 | 15000 | |
| T15 | 30481606 | Unit, PC3048-18, T15 -"Traffic Signal" | PC304818-T15 | Gray | 18" | 408.0 | 2 | 15000 | 1 |
| T15 | 30481455 | Unit, PC3048-18/SYN3048 T15 HBIt WAX_'MRKNG PLT REQ.' | PC304818-T15 | Gray | 18" | 408.0 | 2 | 15000 | |
| T15 | 30481612 | Unit, PC3048-24, T15 - Blank | PC304824-T15 | Gray | 24" | 454.0 | 2 | 15000 | |
| T15 | 30481615 | Unit, PC3048-24, T15 - "Electric" | PC304824-T15 | Gray | 24" | 454.0 | 2 | 15000 | |
| T15 | 30481616 | Unit, PC3048-24, T15_'FIBER OPTICS' | PC304824-T15_457 | Gray | 24" | 454.0 | 2 | 15000 | |
| T15 | 30481617 | Unit, PC3048-24, T15 - "Street Lighting" | PC304824-T15 | Gray | 24" | 454.0 | 2 | 15000 | |
| T15 | 30481460 | Unit, PC3048-24/SYN3048 T15 HBlt WAX_'MRKNG PLT REQ.' | PC304824-T15 | Gray | 24" | 454.0 | 2 | 15000 | |
| T15 | 30481622 | Unit, PC3048-30, T15 - Blank | PC304830-T15 | Gray | 30" | 521.0 | 2 | 15000 | |
| T15 | 30481625 | Unit, PC3048-30, T15 - "Electric" | PC304830-T15 | Gray | 30" | 521.0 | 2 | 15000 | |
| T15 | 30481627 | Unit, PC3048-30, T15 - "Street Lighting" | PC304830-T15 | Gray | 30" | 521.0 | 2 | 15000 | |
| T15 | 30481628 | Unit, PC3048-30, T15 - "Traffic Signal" | PC304830-T15 | Grav | 30" | 521.0 | 2 | 15000 | |
| T15 | 30481618 | Unit, PC3048-24, T15 -"Traffic Signal" | PC304824-T15 | Gray | 36" | 543.0 | 1 | 15000 | |
| T15 | 30481634 | Unit, PC3048-36, T15 - Blank | PC304836-T15 | Grav | 36" | 543.0 | 1 | 15000 | |
| T15 | 30481637 | Unit, PC3048-36, T15 - "Electric" | PC304836-T15 | Grav | 36" | 543.0 | 1 | 15000 | |
| T15 | 30481638 | Unit, PC3048-36, T15_'FIBER OPTICS' | PC304836-T15_457 | Gray | 36" | 543.0 | 1 | 15000 | |
| T.15 | 30481639 | Unit, PC3048-36, T15 - "Street Lighting" | PC304836-T15 | Grav | 36" | 543.0 | 1 | 15000 | |
| T15 | 30481640 | Unit, PC3048-36, T15 - "Traffic Signal" | PC304836-T15 | Gray | 36" | 543.0 | 1 | 15000 | |
| T15 | 30481470 | Unit, PC3048-36/SYN3048 T15 HBlt WAX_'MRKNG PLT REQ.' | PC304836-T15 | Grav | 36" | 543.0 | 1 | 15000 | |
| T22 | 30481001 | Unit, PC3048-18, T22 - "Electric" | PC304818-T22 | Gray | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481003 | Unit, PC3048-18, T22 - Blank | PC304818-T22 | Grav | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481609 | Unit, PC3048-18, T22_'FIBER OPTICS' | PC304818-T22_457 | Gray | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481610 | Unit, PC3048-18, T22 - "Street Lighting" | PC304818-T22 | Gray | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481611 | Unit, PC3048-18, T22 - "Traffic Signal" | PC304818-T22 | Gray | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481456 | Unit, PC3048-18 T22 HBIt WAX_' MRKNG PLT REQ.' | PC304818-T22_999 | Gray | 18" | 526.0 | 2 | 22500 | |
| T22 | 30481004 | Unit, PC3048-24, T22 - "Electric" | PC304824-T22 | Grav | 24" | 572.0 | 2 | 22500 | - |
| T22 | 30481006 | Unit, PC3048-24, T22 - Blank | PC304824-T22 | Gray | 24" | 572.0 | 2 | 22500 | |
| T22 | 30481058 | Unit, PC3048-24, T22 - "Traffic Signal" | PC304824-T22 | Grav | 24" | 572.0 | 2 | 22500 | |
| T22 | 30481620 | Unit, PC3048-24, T22_'FIBER OPTICS' | PC304824-T22_457 | Grav | 24" | 572.0 | 2 | 22500 | |
| T22 | 30481621 | Unit, PC3048-24, T22 - "Street Lighting" | PC304824-T22 | Grav | 24" | 572.0 | 2 | 22500 | |
| T22 | 30481461 | Unit, PC3048-24 T22 HBIt WAX_'MRKNG PLT REQ.' | PC304824-T22_999 | Gray | 24" | 572.0 | 2 | 22500 | |
| T22 | 30481632 | Unit, PC3048-30, T22 - "Street Lighting" | PC304830-T22 | Grav | 30" | 639.0 | 2 | 22500 | |
| T22 | 30481633 | Unit, PC3048-30, T22 - "Traffic Signal" | PC304830-T22 | Gray | 30" | 639.0 | 2 | 22500 | |
| T22 | 30481007 | Unit, PC3048-30, T22 - "Electric" | PC304830-T22 | Gray | 30" | 639.0 | 2 | 22500 | |
| T22 | 30481009 | | PC304830-T22 | Gray | 30" | 639.0 | 2 | 22500 | |
| T22 | 30481010 | | PC304836-T22 | Gray | 36" | 661.0 | 1 | 22500 | |
| T22 | 30481012 | Unit, PC3048-36, T22 - Blank | PC304836-T22 | Gray | 36" | 661.0 | 1 | 22500 | |
| T22 | 30481642 | Unit, PC3048-36, T22_'FIBER OPTICS' | PC304836-T22_457 | Gray | 36" | 661.0 | 1 | 22500 | |
| T22 | 30481643 | Unit, PC3048-36, T22 - "Street Lighting" | PC304836-T22 | Gray | 36" | 661.0 | 1 | 22500 | |
| T22 | 30481644 | 3 3 | PC304836-T22 | Gray | 36" | | 1 | 22500 | |
| T22 | 30481471 | | PC304836-T22 999 | Gray | 36" | | 1 | 22500 | |