

CAT6 DIRECT BURIAL STP (WATER PROOF TAPE)




DESCRIPTION

Category-6 CMXT, 8-Conductor, Direct Burial, 23AWG Solid-Bare Copper.

FEATURES

- High-Performance Data Cable
- 600MHz Bandwith for Data Applications, Fast Ethernet and 155Mbps TP-PMD/CDDI
- Category-6 Shielded Twisted Pair
- Easily Identified Color-Striped Pairs
- 23AWG Solid Copper Conductors
- Exceeds TIA/EIA-568B.2-1, ISO/IEC 11801
- CAN/CSA -C22.2 No. 214
- ETL Listed
- 1000ft Wooden Spool

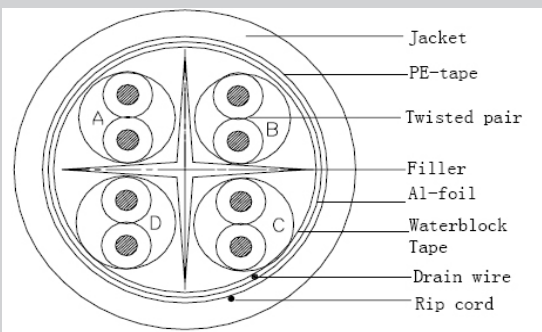

SKU: 069-561/CMXT

Technical Data

Rated Temperature	70 °C
Rated Voltage	30v
Conductor	Solid Bare Copper
Size	23 AWG
Insulation	PE
Insulation Diameter (±0.01mm)	1.02
Twisted Pair Diameter (±0.02mm)	2.04
Seperator	LDPE
Assembly Diameter	6.50mm
PE Tape	Yes
Waterblock Tape	Yes
Al-Foil	Yes
Drain Wire (Tinned Copper)	0.40mm
Jacket	LLDPE (UV)
Outer Diameter (±0.30mm)	8.20
Rip Cord	Yes
Color	Black

Color of Pairs

Pair 1:Blue,White-Blue
 Pair 2:Orange,White-Orange
 Pair 3:Green,White-Green
 Pair 4:Brown,White-Brown

Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED STP 4PR 23AWG OUTDOOR DIRECT BURIAL UV LLDPE CAT6 600MHz TIA/EIA - 568B.2-1 RoHS XXXFT (SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

VERTICAL CABLE

954 454-3554 Florida Office
 951 696-7772 California Office

www.verticalcable.com

Rev. 02/2011
 Subject to change without notice.

CAT6 DIRECT BURIAL STP (WATER PROOF TAPE)

PERFORMANCE

Electrical Characteristics:

Characteristics Impedance	1~400 MHz 100±15 Ohms
Conductor Resistance	93.8 Ohm/Km/20°C Max
Mutual Capacitance	56 pF/M Max
Dielectric Strength	AC 1.5 KV/Min
Spark Test	2.5 KV
DC Resistance Unbalance	5% Max
Delay Skew	1~400 MHz 25nS/100m Max

Electrical Performance

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next Min (dB)
1	20.0	2.0	76.3
4	23.0	3.8	67.3
8	24.5	5.3	62.8
10	25.0	6.0	61.3
16	25.0	7.6	58.3
20	25.0	8.5	56.8
25	24.3	9.5	55.3
31.25	23.6	10.7	53.9
62.5	21.5	15.4	49.4
100	20.1	19.8	46.3
155	18.8	25.1	43.5
200	18.0	29.0	41.8
250	17.3	32.8	40.3
300	16.8	36.4	39.2
400	15.9	43.0	37.3

Frequency (Mhz)	PSNext Min (dB)	ELFEXT Min(db/100m)	ACR Min(dB)
1	74.3	67.8	74.3
4	65.3	55.7	63.5
8	60.8	49.7	57.5
10	59.3	47.8	55.3
16	56.3	43.7	50.7
20	54.8	41.7	48.3
25	53.3	39.8	45.8
31.25	51.9	37.9	43.2
62.5	47.4	31.8	34.0
100	44.3	27.8	26.5
155	41.5	23.9	18.4
200	39.8	21.7	12.8
250	38.3	19.8	7.5
300	37.2	18.2	2.8
400	35.3	15.7	NA

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office

www.verticalcable.com

Rev. 02/2011

Subject to change without notice.