

PREMIUM BARRICADE LIGHTS

Often imitated but never duplicated


FEATURES

- Reduced operating costs with efficient circuitry
- Toughest housing made from polypropylene
- Efficient LED optic lens produce 30% more light output
- Premium barricade lights are built with 4 LED's
- 360 degrees continuous turning
- Meets ITE specs and is NCHRP-350 approved

AID™ PREMIUM BARRICADE LIGHTS feature the industry's most efficient LED optic lens, which produces 30% more light output when compared to competitive brands. These durable lights are built with heavy duty, UV-stabilized polycarbonate and polypropylene to withstand the high impact and harsh weather conditions frequently experienced in construction and other industrial applications. Available as either D-Cell or 6 volt lights, AID™ PREMIUM BARRICADE LIGHTS are rated at operating temperatures ranging from -60° F to 140° F (-50° C to 60° C). Manufactured with the most efficient circuitry on the market allows for increased battery life of up to 8 months, resulting in lower operating costs.

PRODUCES 30% MORE LIGHT OUTPUT THAN COMPETITIVE BRANDS!

ADVANTAGES OF AID™ PREMIUM® BARRICADE LIGHTS

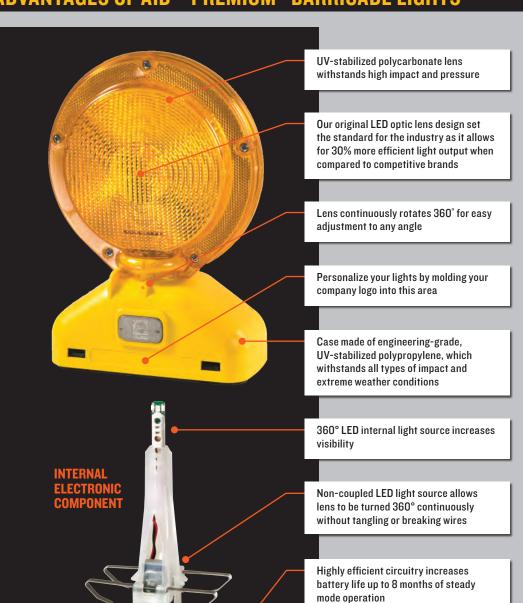

Three styles to choose from: TYPE A/C One or Two-Sided Visibility TYPE B **One-Sided Visibility TYPE D** 360° Visibility

3 VOLT LIGHTS, D-CELL BATTERIES

TYPE A/C (One or Two-Sided Visibility)



7"L X 3.25"W X 10.5"H Weight: 1.4 lbs.

- · Light intensity is up to 8 effective candelas
- · 3-Way Operation: Steady On, Flashing, or Off
- Only operates at night, and automatically turns off during daytime to extend battery life
- Extended battery life of up to 8 months in steady mode

	•		•
MODEL		DES	CRIPTION
BR3.AC.D3.**	2-Side	d Visibility, D-C	Cell, Type A/C with 3.5" D Bolt
BR3.AC1.D3.**	One-Si	ded Visibility, D	O-Cell, Type A/C with 3.5" Bolt

**Specify case color and lens color after model number: Case Color/Lens Color

CASE COLOR: Y = Yellow (Custom case colors available)

LENS COLOR: A = Amber, B = Blue, C = Clear, G = Green,

TYPE B (One-Sided Visibility)



7"L X 6.5"W X 11.5"H Weight: 1.5 lbs.

- · Light intensity is up to 35 effective candelas
- 2-Way Operation: Flashing or Off only
- Operates 24 hours a day, and dims 50% at night extending battery life
- · Extended battery life of up to 45 days

MODEL	DESCRIPTION
BR3.B.D3.**	D-Cell, Type B with 3.5" D Bolt
BL.REMOTE®	Waterproof, infrared remote allows light to be remotely turned on or off up to 500 feet away, and can control one or multiple units.

**Specify case color and lens color after model number: Case Color/Lens Color

CASE COLOR: Y = Yellow (Custom case colors available)

LENS COLOR: A = Amber, R = Red

TYPE D (360° Visibility)



Patteries not included
7"L X 4.5"W X 8"
Weight: 1.1 lbs.

- · Light intensity is up to 2 effective candelas
- 3-Way Operation: Steady On, Flashing, or Off
- Only operates at night, and automatically turns off during daytime to extend battery life
- Extended battery life of up to 8 months in steady mode

MODEL	DESCRIPTION
BR3.D.D3.**	D-Cell, Type D with 3.5" D Bolt

**Specify case color and lens color after model number: Case Color/Lens Color

CASE COLOR: Y = Yellow (Custom case colors available)
LENS COLOR: A = Amber, B = Blue, C = Clear, G = Green,

R = Red

 NOTE: This remote has to be programed to the individual light, and therefore it cannot be purchased separately

6 VOLT LIGHTS

TYPE B (One-Sided Visibility)



Batteries not included

- Light intensity is up to 35 effective candelas
- 2-Way Operation: Flashing or Off only
- Operates 24 hours a day, and dims 50% at night extending battery life
- Extended battery life of up to 45 days

MODEL	DESCRIPTION			
BR6.B.D3**	6 Volt, Type B with 3.5" D Bolt			
BL.REMOTE°	Waterproof, infrared remote allows light to be remotely turned on or off up to 500 feet away. Can control one or multiple units.			
	away. Can control one or multiple units.			

**Specify case color and lens color after model number: Case Color/Lens Color

CASE COLOR: Y = Yellow (Custom case colors available)

LENS COLOR: A = Amber, R = Red

Weight: 1.5 lbs.