




On when
it counts.

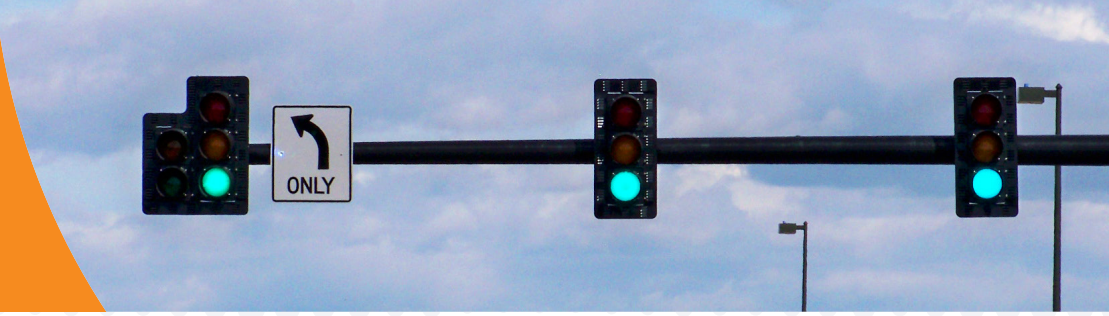

Electrical Specifications:

Operating voltage: Low voltage 10 - 30V DC operation

Operating temperature: -40°F to +165°F (-40°C to +74°C)

Turn-on / Turn-off Time: < 75 msec

Features & Benefits

- Polarity protected
- Robust high flux LED technology
- Ideal for solar and battery application
- Standard 8" and 12" modules
- Fully sealed module
- Incandescent appearance
- Abrasion resistant lens coating
- Easy to install into existing signal enclosure
- Polarity marked on wires

- Quick connect terminals with spade/tab adapters
- RF immunity 10V/M, 80MHz to 1GHz
- Colored wire - Positive; Black wire - Negative
- Meets FCC Title 47, Subpart B, Section 15 Regulations for radiated emissions
- Vibration resistant to MIL-STD-883, Test method 2007
- Moisture resistant per MIL-STD-810F, Method 506.4 for rain and blowing rain
- Power supply is conformal coated
- Transient suppression exceeds ITE VTCSH LED requirements
- Meets ITE VTCSH LED Circular Supplement dated 6/27/2005 intensity, color and uniformity over the full temperature range

Ordering Information

Part Number	Color	Lens Type	Min. Luminous Intensity* (cd)	Dominant Wavelength (nm)	Typical Wattage @ 25°C
8" (200mm) Signal Modules					
433-1110-005XL	Red	Tinted	165	625	5
433-3130-905XL	Yellow	Tinted	410	590	6
433-2120-005XL	Green	Tinted	215	500	7
433-2170-005XL	Green	Clear	215	500	7
12" (300mm) Signal Modules					
433-1210-005XL	Red	Tinted	365	625	6
433-3230-905XL	Yellow	Tinted	910	590	11
433-2220-005XL	Green	Tinted	475	500	6
433-2270-005XL	Green	Clear	475	500	6

*Red and Yellow also available with a clear lens, change 6th digit from 1 and 3 respectively to 7.

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialight.com/Assets/Brochures_And_Catalogs/Signaling/MDTITEXOD15X001.pdf Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT.