

## DESCRIPTION

The Navion™ roadway LED luminaire combines world class optical performance, energy efficiency, and outstanding versatility to meet the requirements of any roadway application. Patented AccuLED Optics™ technology delivers unparalleled uniformity and budget-beating operating costs for municipal streets and highways. UL/cUL listed for wet locations, IP66 enclosure rating available.

## SPECIFICATION FEATURES

### Construction

Heavy-duty cast aluminum housing and door with extruded aluminum heat sink. Tool-less entry, hinged removable power tray door for easy maintenance. 3G vibration rated.

### Optics

Choice of 16 patented, high-efficiency AccuLED Optics. The optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics create consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/- 275K) CCT and minimum 70 CRI. Optional 6000K CCT and 3000K CCT. For the ultimate level of spill light control, an optional house side shield accessory is available. The house side shield is designed to seamlessly integrate with the SL2, SL3, SL4 or AFL optics.

### Electrical

LED drivers are mounted to the removable die-cast aluminum door for optimal heat sinking and ease of maintenance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. 480V is compatible for use with 480V Wye systems only. 10kV UL 1449 surge protection standard. Thermal management incorporates both conduction and convection to transfer heat rapidly away from the LED source for optimal efficiency and light output. Ambient operating temperature from -40°C to 40°C; 50°C ambient capability available. Standard three-position tunnel type compression terminal block. Greater than 90% lumen maintenance expected at 60,000 hours. Light squares are IP66 enclosure rated. Available in standard 1A drive current and optional 530mA and 700mA drive currents.

### Mounting

Four-bolt/two-bracket slipfitter with cast-in pipe stop and 2.5° leveling steps. Fixed-in-place bird guard seals around 1-1/4" or 2" mounting arms.

### Finish

Housing and cast parts finished in five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Heat sink is anodized aluminum. Consult your lighting representative at Eaton for a complete selection of standard colors.

### Warranty

Five-year warranty.



## NVN NAVION

1-6 Light Squares  
LED

ROADWAY LUMINAIRE



## CERTIFICATION DATA

UL/cUL Wet Location Listed  
ISO 9001  
IP66 Light Squares  
3G Vibration Rated  
DesignLights Consortium™ Qualified\*

## ENERGY DATA

Electronic LED Driver  
>0.9 Power Factor  
<20% Total Harmonic Distortion  
120-277V/50 & 60 Hz,  
347V/60 Hz, 480V/60 Hz  
-40°C Minimum Temperature  
+40°C Ambient Temperature Rating

## EPA

Effective Projected Area (Sq. Ft.):

(Fixture Only)

1 Square 0.89  
2 Square's 1.0  
3 Square's 1.2  
4 Square's 1.2  
6 Square's 1.4

(Fixture with AI Arm)

1 Square 1.2  
2 Square's 1.3  
3 Square's 1.5  
4 Square's 1.5  
6 Square's 1.7


## SHIPPING DATA

Approximate Net Weight:


1 Square 17 lbs. (7.7 kgs.)  
2 Square's 22 lbs. (10.0 kgs.)  
3 Square's 26 lbs. (11.8 kgs.)  
4 Square's 31 lbs. (14.1 kgs.)  
6 Square's 36 lbs. (16.3 kgs.)

## DIMENSIONS


### 1, 2 or 3 Light Squares




### 1 Light Square




### 4 or 6 Light Squares



### 2 or 4 Light Squares




### 3 or 6 Light Squares




## ARM DRILLING

### TYPE "M"

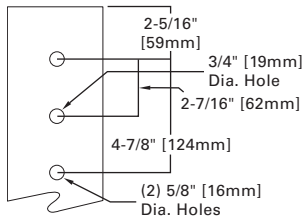


## OPTIONAL ARM

### Upsweep Arm

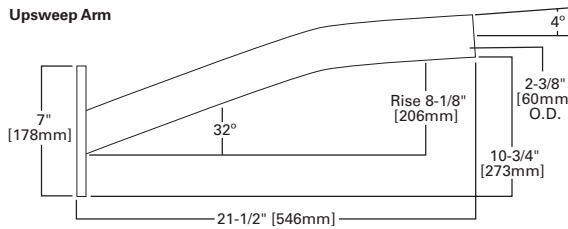


## OPTIONAL ARM


### 15" Straight Arm

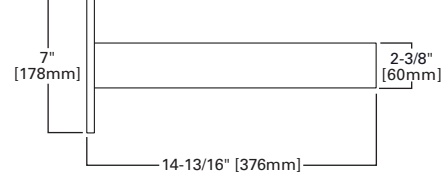


## OPTIC ORIENTATION

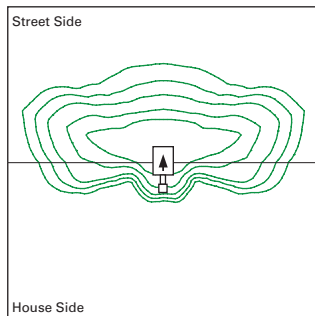

Standard

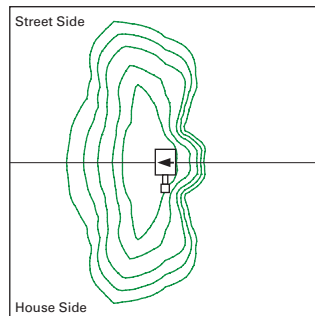


Optics Rotated Left @ 90° (L90)

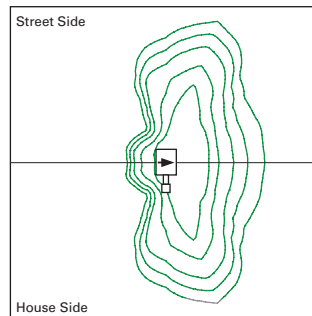


Optics Rotated Right @ 90° (R90)

## OPTICAL DISTRIBUTIONS


### Asymmetric Area Distributions

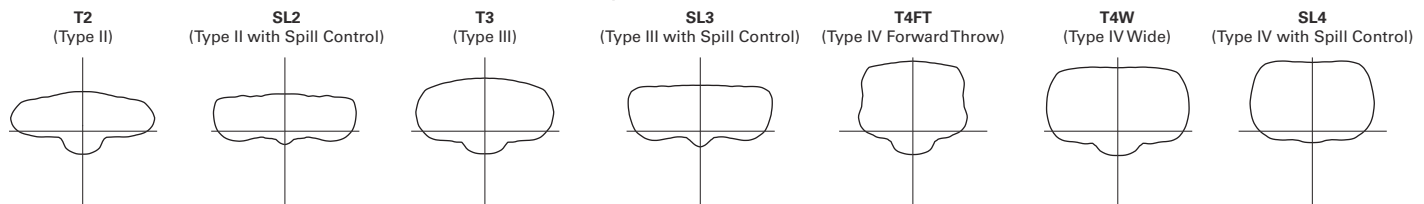


### Asymmetric Roadway Distributions

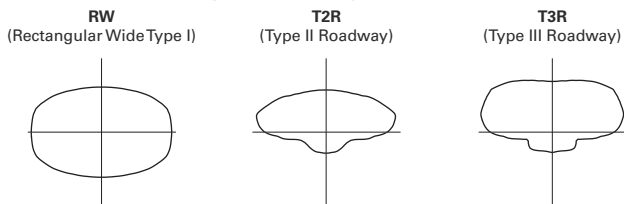

### Symmertric Distributions

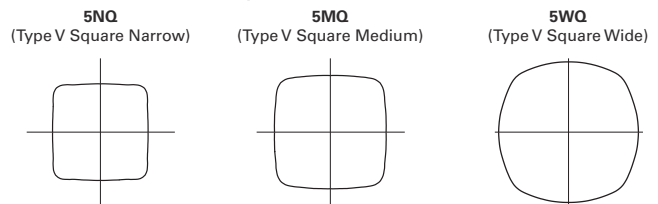

### Specialized Distributions

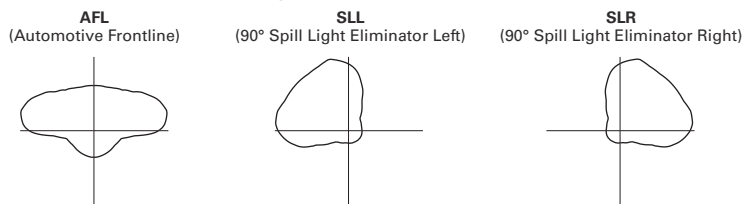

## NOMINAL POWER AND LUMENS (700MA)

Number of Light Squares		1	2	3	4	6
Drive Current		700mA	700mA	700mA	700mA	700mA
Nominal Power (Watts)		38	72	105	138	210
Input Current @ 120V (A)		0.32	0.59	0.86	1.14	1.72
Input Current @ 208V (A)		0.21	0.36	0.51	0.67	1.02
Input Current @ 240V (A)		0.19	0.32	0.45	0.59	0.9
Input Current @ 277V (A)		0.2	0.29	0.40	0.51	0.80
Optics						
T2	Lumens	3,768	7513	11,172	15,047	22,217
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3
T2R	Lumens	4,034	8,043	11,961	16,109	23,785
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3
T3	Lumens	3,851	7,677	11,417	15,377	22,704
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4
T3R	Lumens	3,916	7,806	11,609	15,636	23,086
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4
T4FT	Lumens	3,880	7,736	11,504	15,494	22,877
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4
T4W	Lumens	3804	7,584	11,279	15,191	22,429
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4
SL2	Lumens	3,774	7,524	11,190	15,071	22,252
	BUG Rating	B1-U0-G1	B1-U0-G2	2-U0-G2	B2-U0-G3	B3-U0-G4
SL3	Lumens	3,845	7,665	11,399	15,352	22,668
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4
SL4	Lumens	3,672	7,322	10,888	14,665	21,653
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G4
5NQ	Lumens	3,957	7,890	11,733	15,803	23,333
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2
5MQ	Lumens	4,100	8,174	12,155	16,371	24,172
	BUG Rating	B2-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3
5WQ	Lumens	4,005	7,985	11,874	15,993	23,614
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3
SLL/SLR	Lumens	3,400	6,779	10,081	13,577	20,047
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4
RW	Lumens	3,934	7,843	11,663	15,709	23,194
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2
AFL	Lumens	3,944	7,864	11,695	15,751	23,256
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G1	B2-U0-G2	B3-U0-G2

\* Nominal data for 4000K CCT.

## LUMEN MULTIPLIER

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

## LUMEN MAINTENANCE

Ambient Temperature	TM-21 Lumen Maintenance (60,000 Hours)	Theoretical L70 (Hours)
25°C	> 94%	> 350,000
40°C	> 93%	> 250,000
50°C	> 90%	> 170,000

## ORDERING INFORMATION

Sample Number: NVN-AE-01-E-U-T3R-10K-4-AP

Product Family <sup>1,2</sup>	Light Engine	Number of Light Squares <sup>3</sup>	Driver	Voltage	Distribution	Surge Protection
NVN=Navion	AE=1A Drive Current	01=1 02=2 03=3 04=4 06=6	E=Non-Dimming D=Dimming (0-10V) <sup>4</sup>	U=Universal (120-277V) 8=480V <sup>5</sup> 9=347V	T2=Type II T2R=Type II Roadway T3=Type III T3R=Type III Roadway T4FT=Type IV Forward Throw T4W=Type IV Wide 5NQ=Type V Narrow 5MQ=Type V Square Medium 5WQ=Type V Square Wide SL2=Type II w/Spill Control SL3=Type III w/Spill Control SL4=Type IV w/Spill Control SLL=90° Spill Light Eliminator Left SLR=90° Spill Light Eliminator Right RW=Rectangular Wide Type I AFL=Automotive Frontline	10K=Cooper 10kV Surge Module (Standard) X=Driver Surge Protection Only <sup>6</sup>
Options (Add as Suffix)						
2L=Two Circuits <sup>7</sup> 7030=70 CRI / 3000K <sup>8</sup> 7060=70 CRI / 6000K <sup>8</sup> 530=Drive Current Factory Set to 530mA <sup>9, 10</sup> 700=Drive Current Factory Set to 700mA <sup>9, 10</sup> 4=NEMA Twistlock Photocontrol Receptacle 4N7=NEMA 7-PIN Twistlock Photocontrol Receptacle <sup>11</sup> IP66=IP66 Rated HA=50°C High Ambient L90=Optics Rotated 90° Left R90=Optics Rotated 90° Right CE=CE Marking <sup>12</sup>				MS/DIM-L08=Motion Sensor for Dimming Operation, Maximum 8' Mounting Height <sup>13</sup> MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height <sup>13</sup> MS/DIM-L40=Motion Sensor for Dimming Operation, 21' - 40' Mounting Height <sup>13</sup> MS/X-L08=Bi-Level Motion Sensor, Maximum 8' Mounting Height <sup>14</sup> MS/X-L20=Bi-Level Motion Sensor, 9' - 20' Mounting Height <sup>14</sup> MS/X-L40=Bi-Level Motion Sensor, 21' - 40' Mounting Height <sup>14</sup> K=Level Indicator AI=Site Arm Included <sup>15</sup> A15=Arm Included (15" Straight Arm) <sup>16</sup> LCF=Light Square Trim Plate Painted to Match Housing HSS=Factory Installed House Side Shield <sup>17</sup> DIMRF-LW=LumaWatt Wireless Sensor, Wide Lens for 8' - 16' Mounting Heights <sup>18, 19</sup> DIMRF-LN=LumaWatt Wireless Sensor, Narrow Lens for 16' - 40' Mounting Heights <sup>18, 19</sup>		
Color				Accessories (Order Separately)		
AP=Grey (Standard) BZ=Bronze BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White				OA/RA1016=NEMA Photocontrol - Multi-Tap OA/RA1027=NEMA Photocontrol - 480V OA/RA1201=NEMA Photocontrol - 347V OA/RA1013=Photocontrol Shorting Cap OA/RA1014=NEMA Photo Control - 120V OA1223=10kV Surge Module Replacement FSIR-100=Wireless Configuration Tool for Motion Sensor <sup>20</sup> LS/HSS=Field Installed House Side Shield <sup>21</sup> A15=15" Straight Arm <sup>22</sup>		

## NOTES:

- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WP513001EN for additional support information.
- DesignLights Consortium™ Qualified. Refer to [www.designlights.org](http://www.designlights.org) Qualified Products List under Family Models for details.
- Standard 4000K CCT and nominal 70 CRI.
- Must specify 4N7 option.
- Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems).
- Consult factory for driver surge protection values.
- Low-level output varies by number of light squares specified. Consult factory. Requires two or more light squares. No terminal block with 2L options.
- Use dedicated IES files for 3000K and 6000K when performing layouts. These files are published on the Navion luminaire product page on the website.
- 1 Amp standard. Use dedicated IES files for 530mA and 700mA when performing layouts. These files are published on the Navion luminaire product page on the website.
- Not available with any MS/DIM or DIMRF options.
- Only available with dimming driver.
- CE is not available with the DIMRF, MS, MS/X, MS/DIM, 4 or 4N7 options. Available in 120-277V only.
- Sensor mounted externally. Must specify dimming driver. Consult factory for more information.
- Sensor mounted externally. Available in 2, 3, 4 or 6 Light Square configurations. Replace "X" with number of Light Squares in low output mode. For ON/OFF operation, replace "X" with "0". Maximum two Light Squares in low output mode. Not available with dimming driver. No terminal block with bi-level operation.
- 22" upsweep arm. Round pole adapter included.
- Round pole adapter and mounting hardware included, "M" drilling pattern.
- Only for use with SL2, SL3, SL4 and AFL distributions. The Light Square trim plate is painted black when the HSS option is selected.
- LumaWatt wireless sensors are factory installed and require network components RF-EM-1, RF-GW-1 and RF-ROUT-1 in appropriate quantities. See [www.eaton.com/lighting](http://www.eaton.com/lighting) for LumaWatt application information.
- LumaWatt wireless system is not available with 4N7 (Not needed) or with FADC, 530mA, 700mA or 2L options.
- This tool enables adjustment of parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Eaton for more information.
- One required for each light square.
- Replace XX with paint color.

## Also includes:

- 10-yr warranty
- Label for Type/Class indicated by Number of Light Squares