

BULKU304824F081010

BULK VAULT HDPE STRUCTURAL FOAM

SHIELD X COMPOSITE COVER



FEATURES:


- 30" X 48" X 24" (open floor) (actual dimensions on drawing)
- BULK VAULT – SHIELD X Split COVER- Tier 22 Load Rated (ANSI/SCTE 77: 2013)
- (4) Cover locking Auger bolts, Hex (9/16") or Penta (7/8") head with washer
- (4) Non-Seizing Fastening System, Field Replaceable
- (4) Embedded Composite Rack Support
- (1) Lifting slot equipped with stainless steel pin (slot is approximately 2 3/4" x 3/4")
- (4) Winterized Cable Drop slide (1 1/4" X 1 1/4")
- (1) Galvanized Center Beam
- (2) TRAFFIC SIGNAL Logo Disk
- (1) 5' Tracer Wire

WEIGHT & SHIPPING:

- Cover Weight: 50 lbs (Per Half)
- Box Weight: 88 lbs
- Assembly Weight : 188 lbs

PERFORMANCE TESTING:

- ANSI/SCTE 77: 2013 - TIER 22 Rated (33,750 lbs)
- AS3996 – Class C
- EN124 Class B125
- ASTM C1028-07 & AS-4586 (Slip Resistance)
- 10,000 Hour Xenon-Arc Exposure (No fiber-bloom)
- ASTM D635-06 (Flammability)

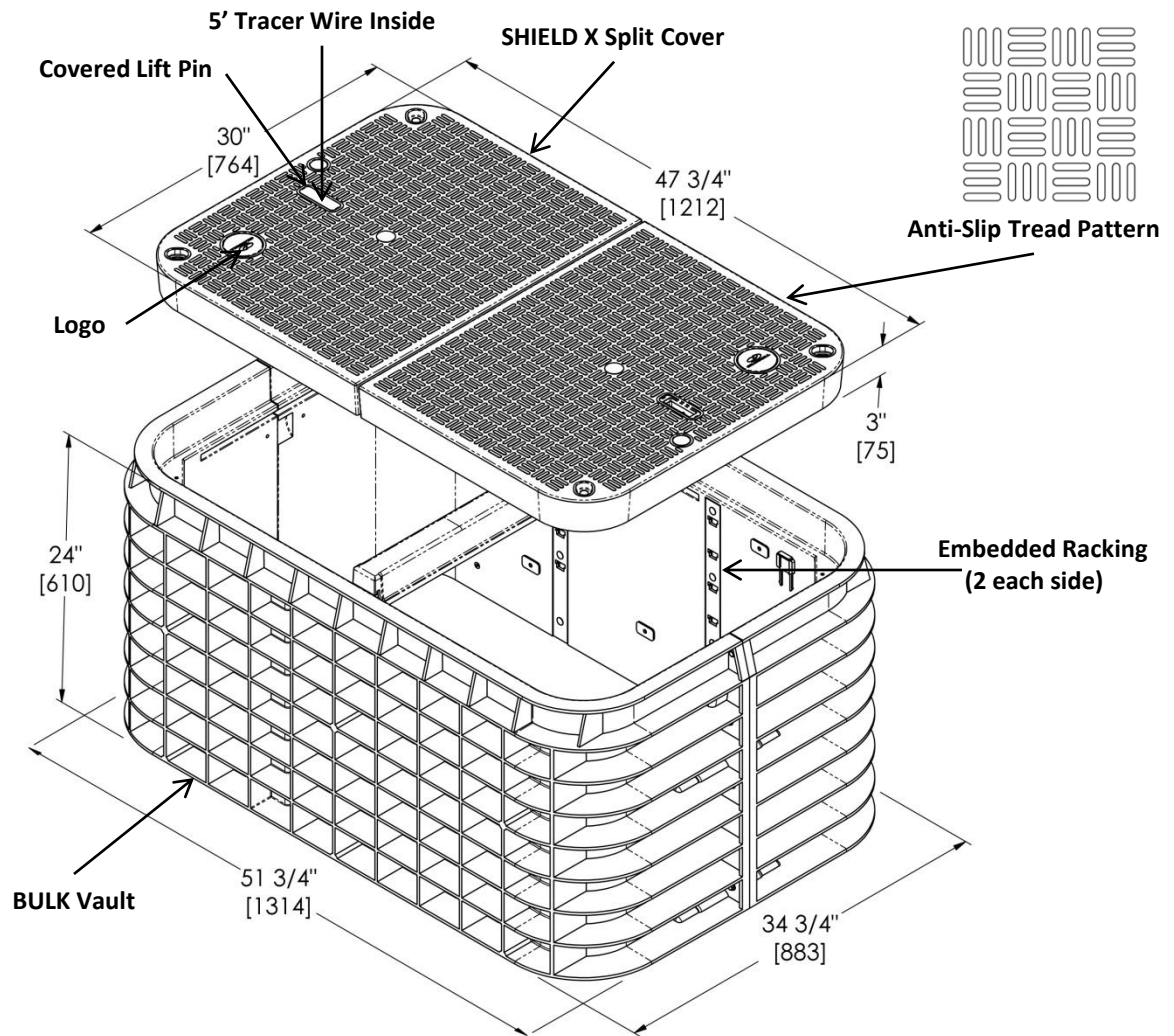

| Inside Dimensions | | |
|-------------------|------------------|--------------|
| Length | Width | Depth |
| 46 1/2" [1180] | 28 3/4" [730] | 21" [533] |

