

# DRYCONN®

## WATERPROOF CONNECTORS


Filled Connectors for Direct Bury Use



### INSTALLATION INSTRUCTIONS

**IMPORTANT:** Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Strip #22 - #16 wires 1/2" (12.7mm) and #14 - #8 wires 7/16" (11.11mm).
2. Align any frayed strands or conductors.
3. Pre-twisting unnecessary. Place stripped wires together with ends of insulation even.
4. Twist connector onto wires pushing firmly until hand-tight. Do not over torque.
5. Wipe sealant in and around conductors and connector opening while tightening. Do not reuse.

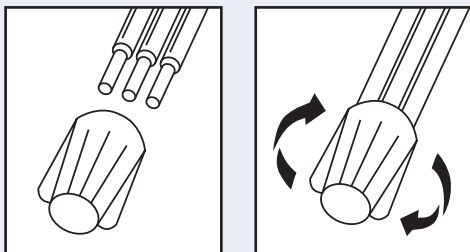

U.S. Pat. 5,771,578 and additional Patents Pending apply. All other trademarks, U.S. and Foreign Patents apply. All Rights Reserved.

Selected 600V Wire Combinations  
For use with solid and/or stranded combinations.

4-6 #18	2-6 #16	2-4 #14
2-3 #12	2 #12 w/1 #14	1 #12 w/1 #18, 16 or 14
3 #16 w/2 #18	2 #14 w/2 #16	1 #10 w/1-2 #14

Contact factory for a complete list of wire combinations at 800.633.0232.

### DryConn® King 4 Yellow


Catalog #	Selling Unit
10444	Bag of 10

### PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 600V max. building wire  
(1000V max. signs or luminaries)  
Connector Size: 1 19/64" x 43/64"  
Wire Type: Copper/Copper  
Wire Range: Min #18/Max #12  
Temperature Rating: 105°C (221°F)  
Silicone Sealant Temperature: -45°F to 400°F  
UL Designation: MWP

Measurements (Inches):

A - 1.30  
B - 0.67  
C - 0.51



- UL 486D Listed as a sealed wire connector system. For use in damp, wet, raintight, submersible and direct bury locations. Not to be used in continuous submersion applications.