

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * FABRICATED FROM .125 THK NATURAL ALUMINUM
- * FACTORY WIRING 600 VOLT RATED COPPER
- * ALL EXTERIOR HINGES CONTINUOUS PIANO TYPE
- * ALL COMPONENTS ARE U.L. LISTED.

PAGE 1 OF 2

COMPONENT DIRECTORY


No.	DESCRIPTION
CAT. NO. USP16R-M2100-112C-OPK	
1	LANDING LUGS 350KCMIL-6 PER PH
2	MTR SOCKET 200A 5J HORN BYPASS
3	MAIN CB 100A 2P 120/240VAC 10KAIC
4	LOAD CENTER 125A 12CKT 1-PHASE
5	(4) CB 30A 2P 120/240VAC 10KAIC
6	(1) CB 15A 1P 120/240VAC 10KAIC
7	(4) CONTACTOR 66A 3P EH LIG ABB #AF65-30
8	(4) TERM BLK 2P 86A MARATHON OF EQUAL
9	SWITCH TOGGLE SPST 20A
10	PE RECEPTACLE
11	
12	
13	
14	INSULATED NEUTRAL BUS
15	GROUND BUS
16	#2 CORBIN / PELCO LOCK

SERVICE PEDESTAL

S.O. No.	QTY.
DATE	30 APRIL 2019
JOB NAME	-
DISTRIBUTOR	POWER EQUIPMENT SALES

USP NON-RESIDENTIAL SERVICE PEDESTAL
0 - 200 AMPERES
0 - 600 VOLTS

PACIFIC UTILITY PRODUCTS
2950 E. PHILADELPHIA ST.
ONTARIO CALIFORNIA 91761

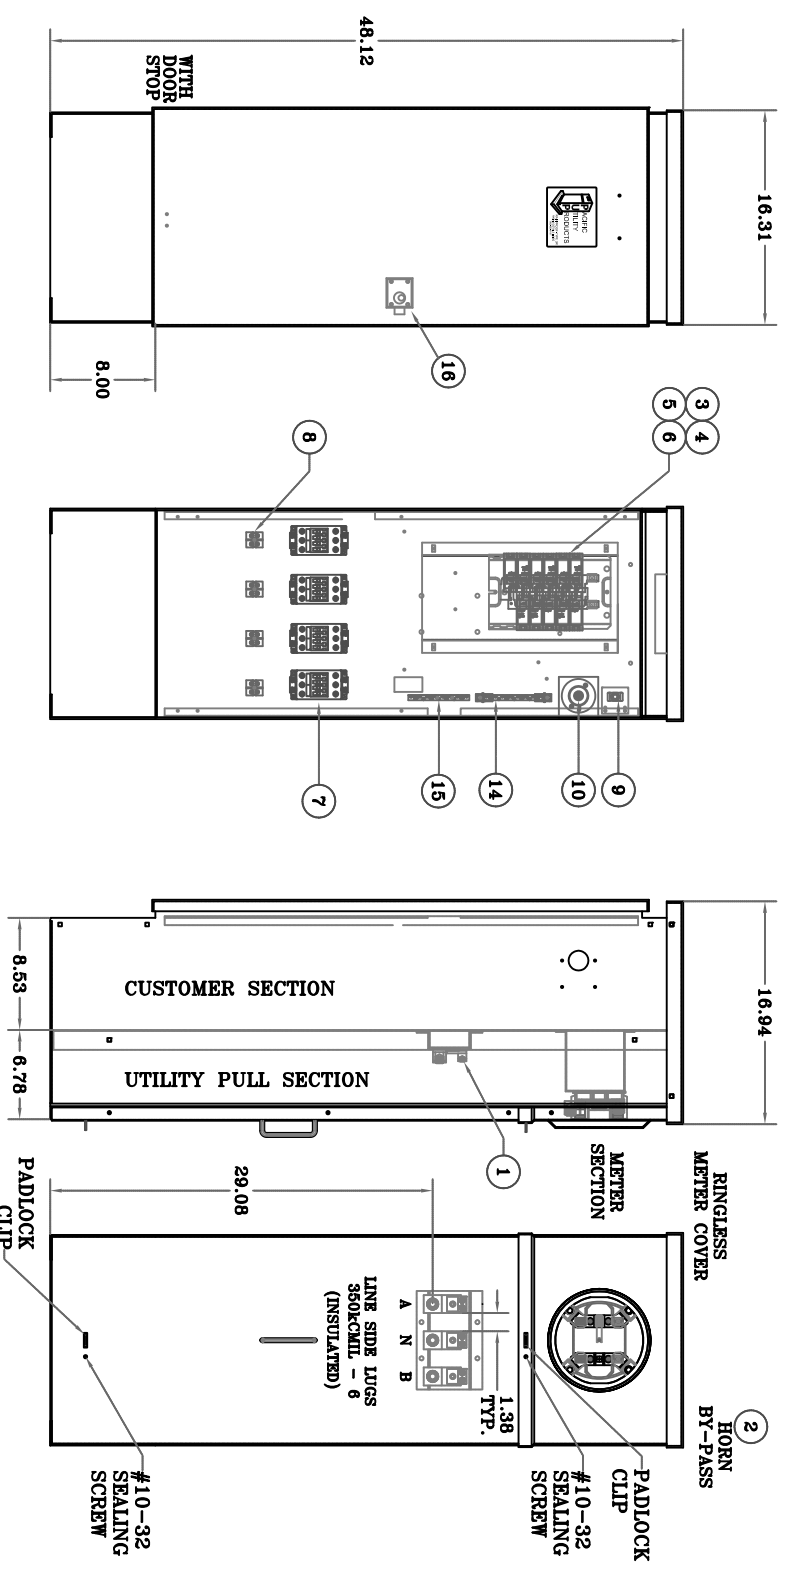

USP16R-M2100-112C-OPK-AL

FALL147066